TX1500 Matrix, TX1500 Keypad,
And TX1500/AL16

Installation Guide

Building Block Video Ltd.,
17 Apex Park
Diplocks Industrial Estate,
Hailsham, East Sussex, BN27 3JU UK.
Tel: +44 (0)1323 842727
Fax: +44 (0)1323 842728
Support: +44(0)1323 444600
Web Site: http://www.bbvcctv.com

Contents

Unpacking 3
Safety Precautions 3
System Components 3

Description 4
TX1500 components 4
Product Codes 4

TX1500 System Example 5

BBUS control bus 6
BBUS example wiring 7
RS422 Telemetry port 8
RS422 wiring diagrams 8, 9

Video Input Card 10
Monitor Output Card 11
Matrix ALARM 00 & relay connector 11
96 Camera subrack wiring 12
Matrix Diagnostics 13

TX1500/AL16 16 Input Alarm Card 14

Configuring the TX1500 15
- System Basics 16
- Access Tables 17
- Alarm Menus 18
- Sequences 19
- Camera Types 20
- Vista Extended Commands 21
- Telemetrey Functions 22
- Set Password 23
- System Parameters 24
- System Parameters 2 25

Up-the-coax receiver programming 26

TX1500 USER GUIDE 27
- Selecting a Camera 27
- Selecting a Monitor 27

- Moving a Camera 28
- Lens Keys 28
- Auxiliary Outputs 28

- Go to Preset Position 29
- Programming a Preset Position 29

- Starting a Preset Patrol 30
- Starting a Monitor Sequence 30
- Triangle/Relay Key 30
- Alarm Key 30

TX1500/KBD System Keyboard 31
- Adressing the Keyboard 31
- Enable/Disable the Program Key 31
- BBUS Termination 32
- Self Test 33

UNPACKING

Inspect the packaging for signs of damage. If damage has occurred, advise the carriers and/or the suppliers immediately. Unpack the units carefully and check that all the items are present and correct.

SAFETY PRECAUTIONS

All normal safety precautions as laid down by British Standards and the Health and Safety at Work Act (or the relevant National safety legislation if installing in a country outside the U.K.) should be observed, and servicing should be referred to qualified service personnel.

SYSTEM COMPONENTS

Each complete system will comprise of at least the following:

1 x TX1500 video matrix is enclosed in a 19" sub rack.
1 x TX1500/KBD system Keyboard

3 x RJ45 straight patch cables
3 x RJ45 breakout boxes with self adhesive mounting pad

2 x 12Vdc1000mA power supply (1 for the matrix and 1 for the Keyboard)

TX1500/32/8 matrix

Standard TX1500/KBD System Keyboard

OVERVIEW

The TX1500 is a video matrix and telemetry control system offering control of up to 96 cameras from 4 control positions. Eight monitor outputs are provided with monitors 1, 2, 3 & 4 having on screen display.

BBV & VISTA up-the-coax and BBV 422 & VISTA 485 linked receivers and domes can be controlled when viewed on any monitor. Pelco and VCL up-the-coax control is limited to monitors 1-4.

Monitor outputs tested via CRT Monitors, recommended maximum cable (RG59) distance from matrix = 25 meters.
TFT Monitors may require additional amplification.

Site alarms and contacts are handled with alarm cards, each providing 16 inputs. Up to 6 alarm cards can be linked into the TX1500 system either locally or remotely offering 96 alarm inputs
The TX1500/BBUS-IF interface, which appears as another Keyboard, gives off-site control, via video/data transmission equipment, and local control from PC and other equipment. The interface can be controlled using either the TX1000 or TX1500 control protocol via either RS232 or RS422.

The TX1500 matrix communicates with all Keyboards, alarm cards and BBUS-IF interfaces via a polled 4-wire multidrop RS422 control bus named BBUS.

The matrix itself is in a subrack which can be fitted to a 19" rack using supplied fixing brackets. The fixing brackets can be mounted on the front or rear face of the subrack. By fitting the ears on the back of the subrack, it can also be wall mounted.

Alarm cards, BBUS-IF and StarCards are supplied in 1U sub racks as standard or can be fitted into the subrack with the matrix if specified when ordering.
Larger subracks than standard can be supplied if specified when ordering.

PRODUCT CODES

TX1500/16/8	16 camera, 8 monitor matrix inc Keyboard (supplied in 3U subrack)
TX1500/32/8	32 camera, 8 monitor matrix inc Keyboard (supplied in 3U subrack)
TX1500/48/8	48 camera, 8 monitor matrix inc Keyboard (supplied in 5U subrack)
TX1500/64/8	64 camera, 8 monitor matrix inc Keyboard (supplied in 5U subrack)
TX1500/80/8	80 camera, 8 monitor matrix inc Keyboard (supplied in 7U subrack)
TX1500/96/8	96 camera, 8 monitor matrix inc Keyboard (supplied in 7U subrack)
TX1500/KBD	Keyboard with 3-axis joystick
TX1500/AL16	16 input alarm card, volts free normally closed inputs
TX1500/BBUS-IF	BBUS Interface to allow control from a PC or other 3rd party equipment
STARCARD	StarCard with 8 x RS422/485 outputs to allow star wired telemetry
STARCARD/CONVERTER	As STARCARD with built in protocol conversion to allow control of domes etc.

EXPANDING AN EXISTING SYSTEM on site (maximum of 96 camera inputs)

The TX1500 can be expanded to a maximum of 96 cameras.

Larger subracks are included when required necessary. All the cards from the existing subrack must be transferred to the new subrack. Note down and put somewhere safe all the external connection information to aid re-commissioning the system.

PRODUCT CODES

TX1500/EXP16/17-32/MK2	16 video input card to expand from a 16 camera to 32 camera system
TX1500/EXP16/33-48/MK2	16 video input card to expand from a 32 camera to 48 camera system
TX1500/EXP16/49-64/MK2	16 video input card to expand from a 48 camera to 64 camera system
TX1500/EXP16/65-80/MK2	16 video input card to expand from a 64 camera to 80 camera system
TX1500/EXP16/81-96/MK2	16 video input card to expand from a 80 camera to 96 camera system

3U	TX1500/3U-SUBRACK
5U	TX1500/5U-SUBRACK
7U	TX1500/7U-SUBRACK

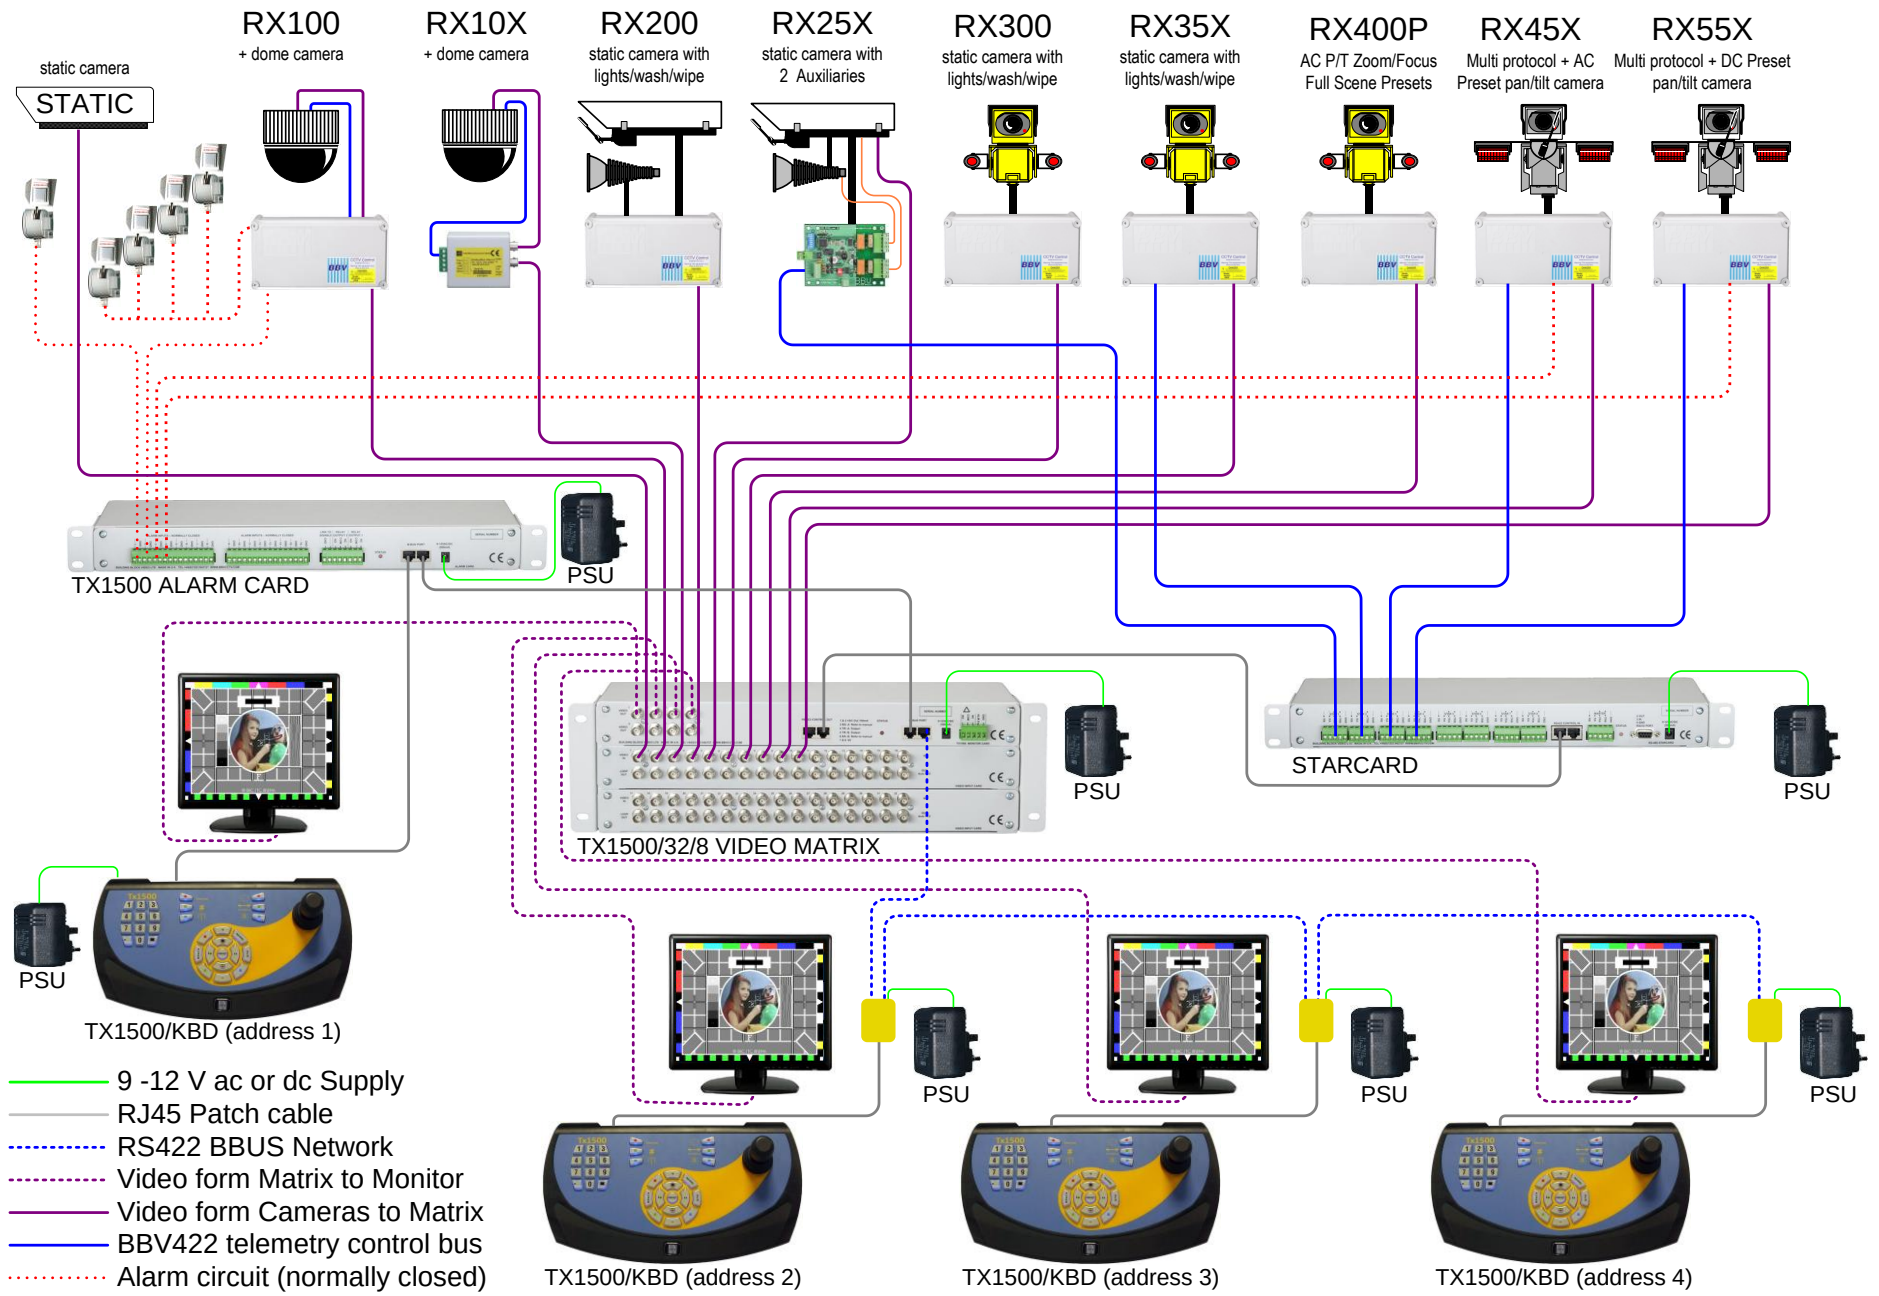
RX100
+ dome camera
RX10X
+ dome camera
RX200
static camera with lights/wash/wipe
RX25X
static camera with 2 Auxiliaries
RX300
static camera with lights/wash/wipe
RX35X
static camera with lights/wash/wipe
RX400P
AC P/T Zoom/Focus Full Scene Presets
RX45X
Multi protocol + AC Preset pan/tilt camera
RX55X
Multi protocol + DC Preset pan/tilt camera
static camera
STATIC
TX1500 ALARM CARD
PSU
TX1500/32/8 VIDEO MATRIX
PSU
STARCARD
PSU
PSU
TX1500/KBD (address 1)
PSU
PSU
PSU
TX1500/KBD (address 2)
TX1500/KBD (address 3)
TX1500/KBD (address 4)
9 -12 V ac or dc Supply
RJ45 Patch cable
RS422 BBUS Network
Video form Matrix to Monitor
Video form Cameras to Matrix
BBV422 telemetry control bus
Alarm circuit (normally closed)

BBUS CONTROL BUS

The TX1500 communicates with all Keyboards, alarm cards and BBUS-IF interfaces via a polled 4 wire multidrop RS422 control bus named BBUS.

All the units are equipped with standard RJ45 connectors allowing cat 5 patch cables to be used to connect over short distances. On the larger sites RJ45 break out boxes are used to link between cat 5 cables and good quality screen twin twisted pair data cable. Suitable types are the following Belden cables: 9842, 9829, 8162, 8132.

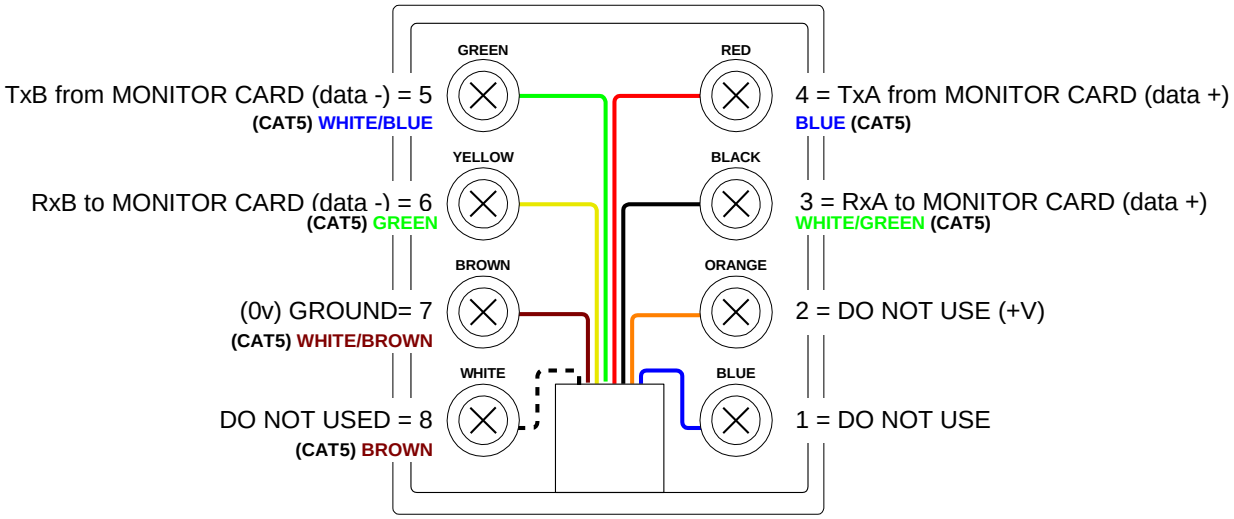

Fig 5. BBUS - RJ45 breakout box connector, MONITOR CARD end of BBus.

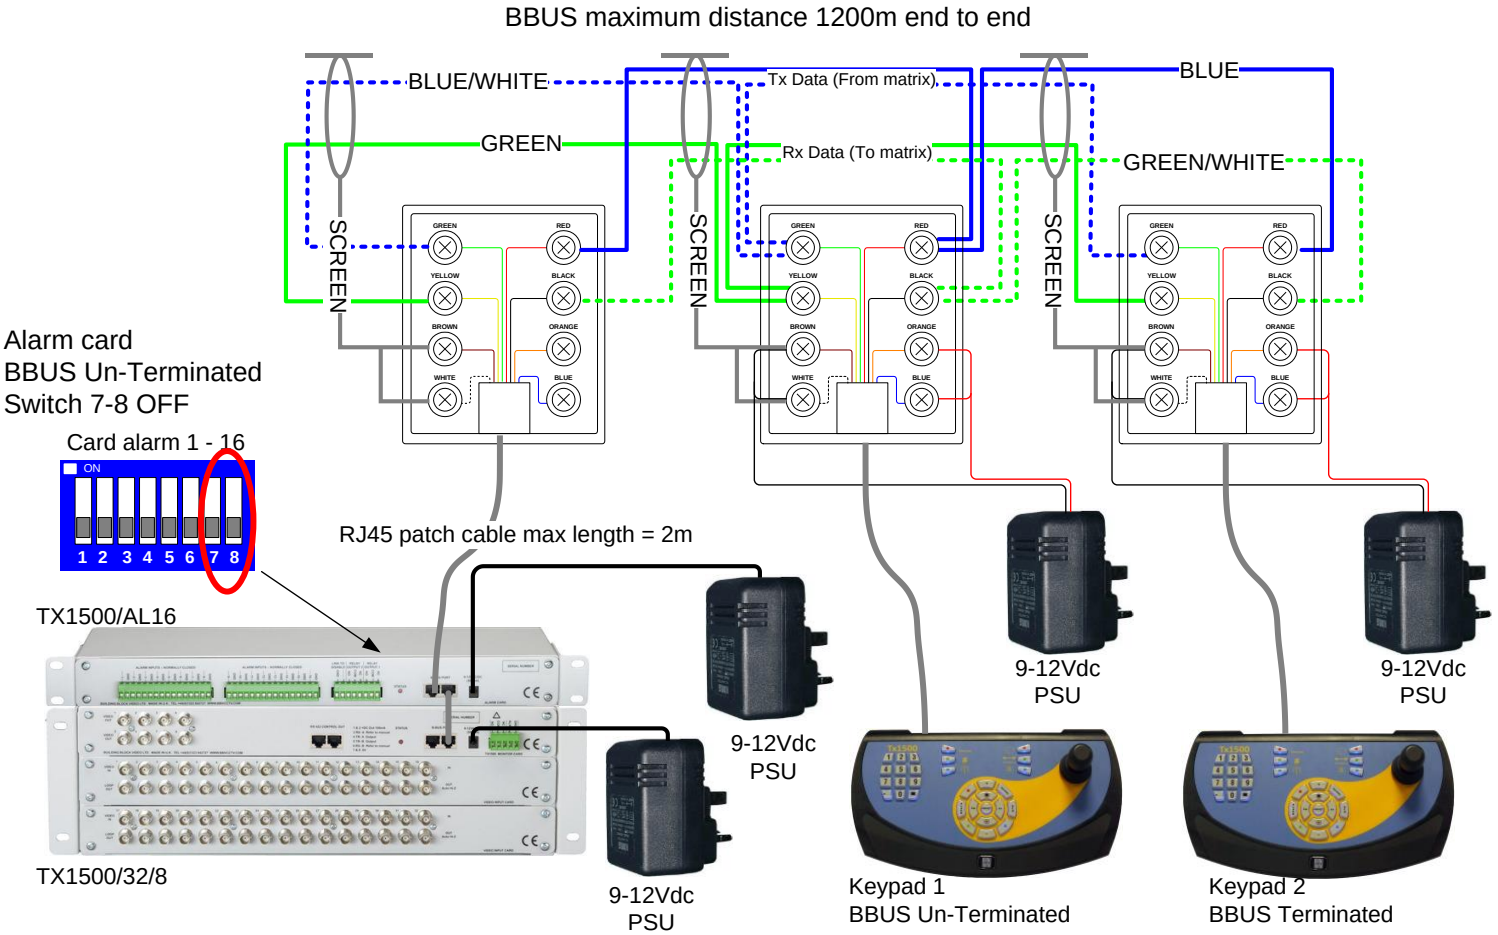

Fig 6. Keyboard BBUS wiring

SYSTEM BBUS WIRING EXAMPLES

The following diagrams show examples of various wiring schemes.

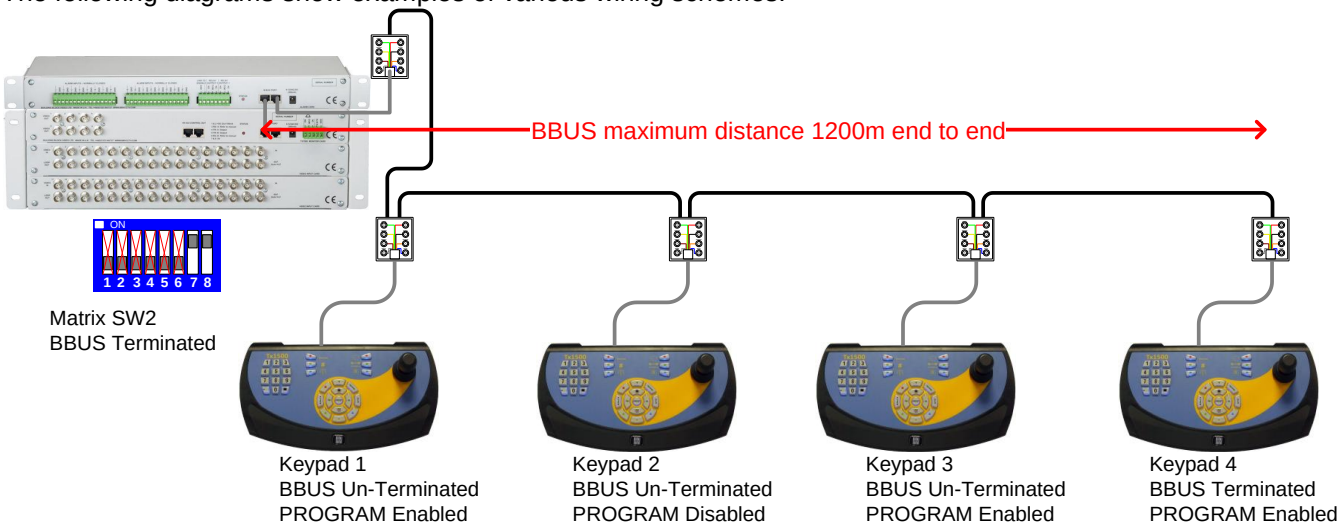

Fig 7. Example with all Keyboards daisy chained from the TX1500 matrix using a single BBUS leg.

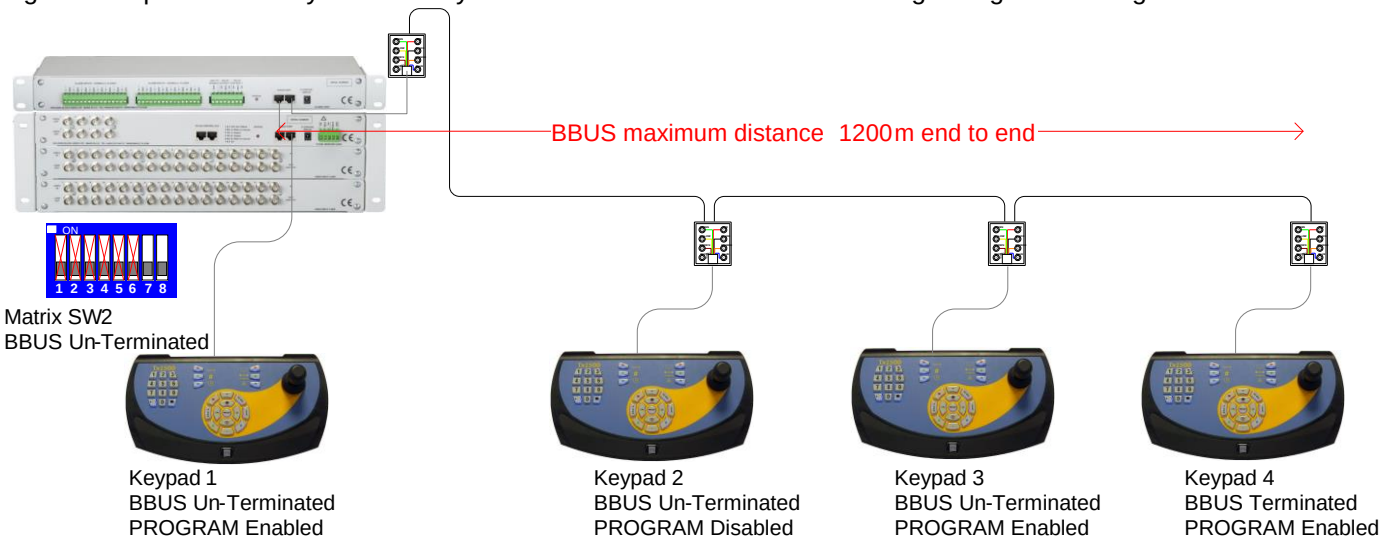

Fig 8. Example with all Keyboards daisy chained from the TX1500 matrix using two BBUS legs.

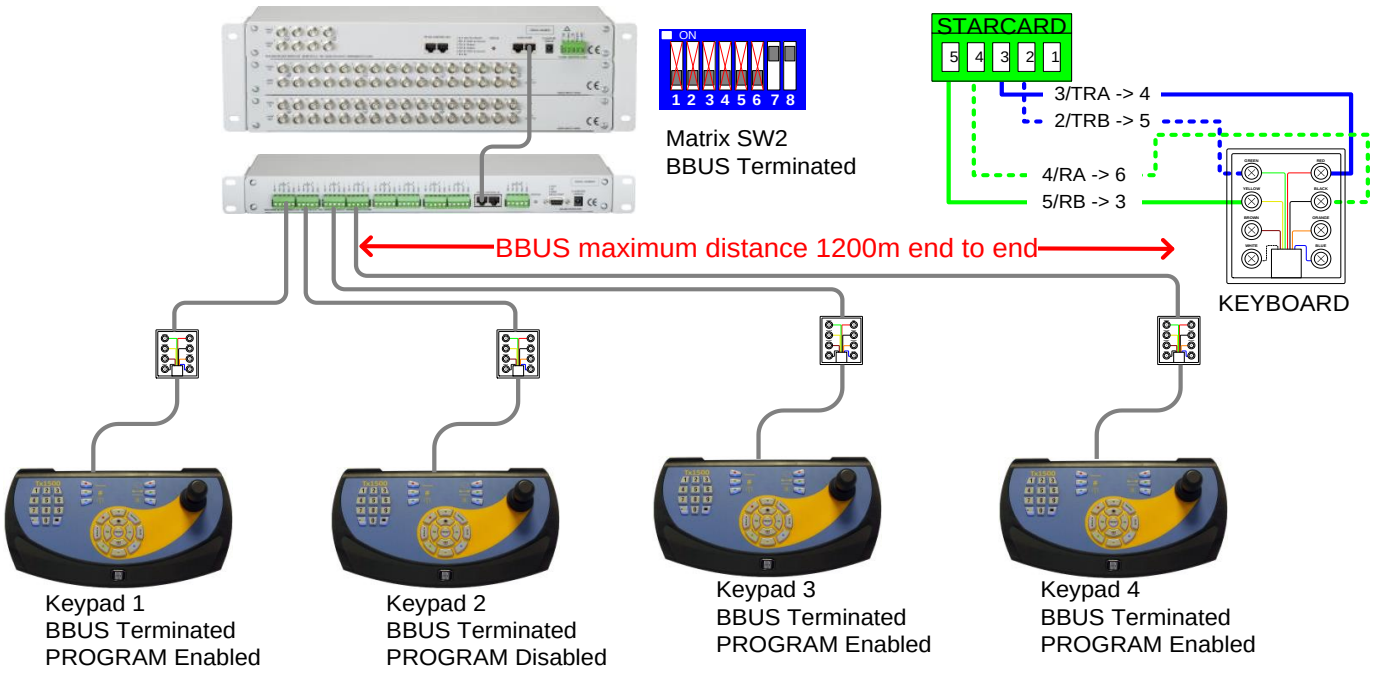

Fig 9. Use of a starcard to allow star wiring of keyboards.

RS422 TELEMETRY OUT

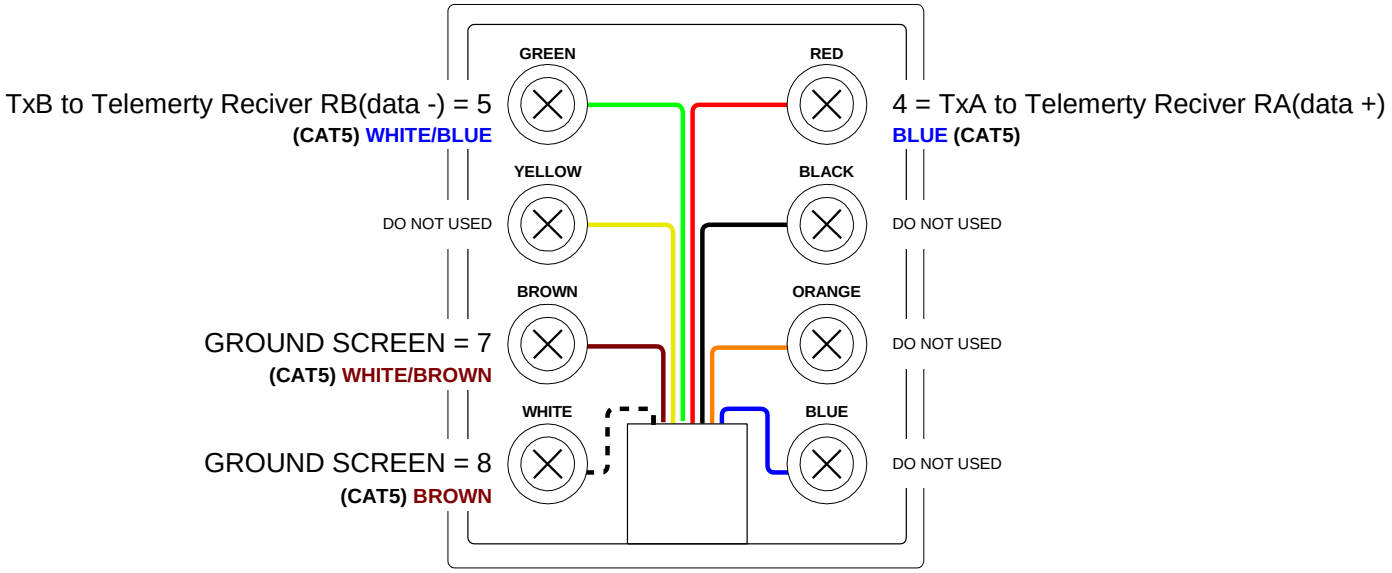

Fig 10. TELEMETRY – RJ45 breakout box connector.

This port provides telemetry control via BBV RS422. Again a Cat 5 RJ45 patch cable and breakout box is used to connect the telemetry receivers via single twisted pair cable. It is possible to either wire the network in a daisy chained or star configuration using an optional BBV Starcard.

RS422 wiring configurations are shown below and on the following page.

RS422 TELEMETRY WIRING CONFIGURATIONS

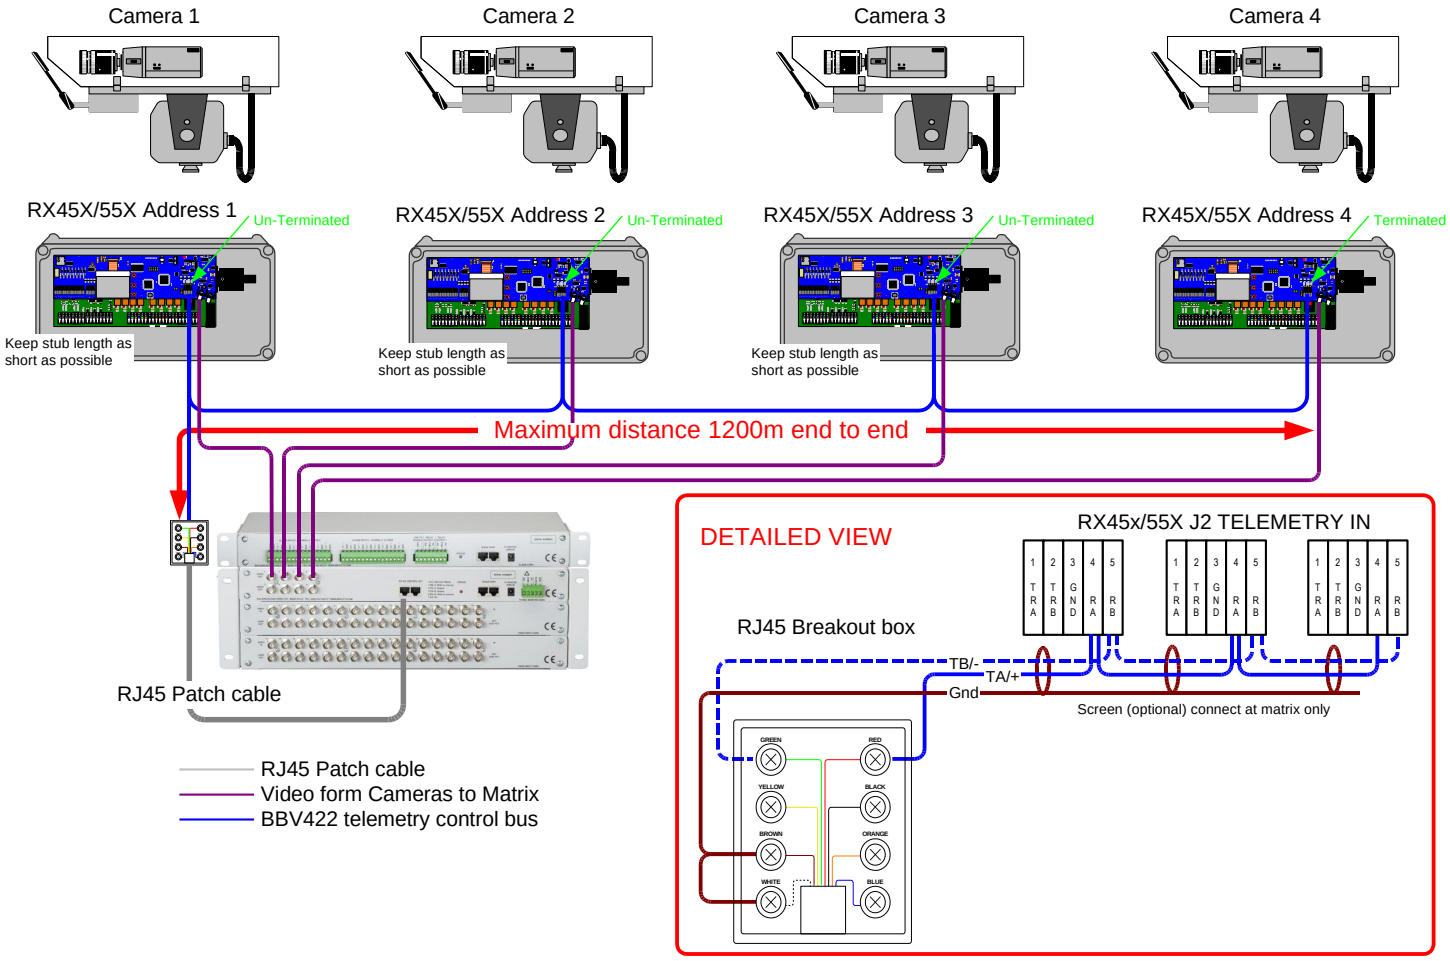

Fig 11. Daisy Chained RS422 Telemetry Wiring

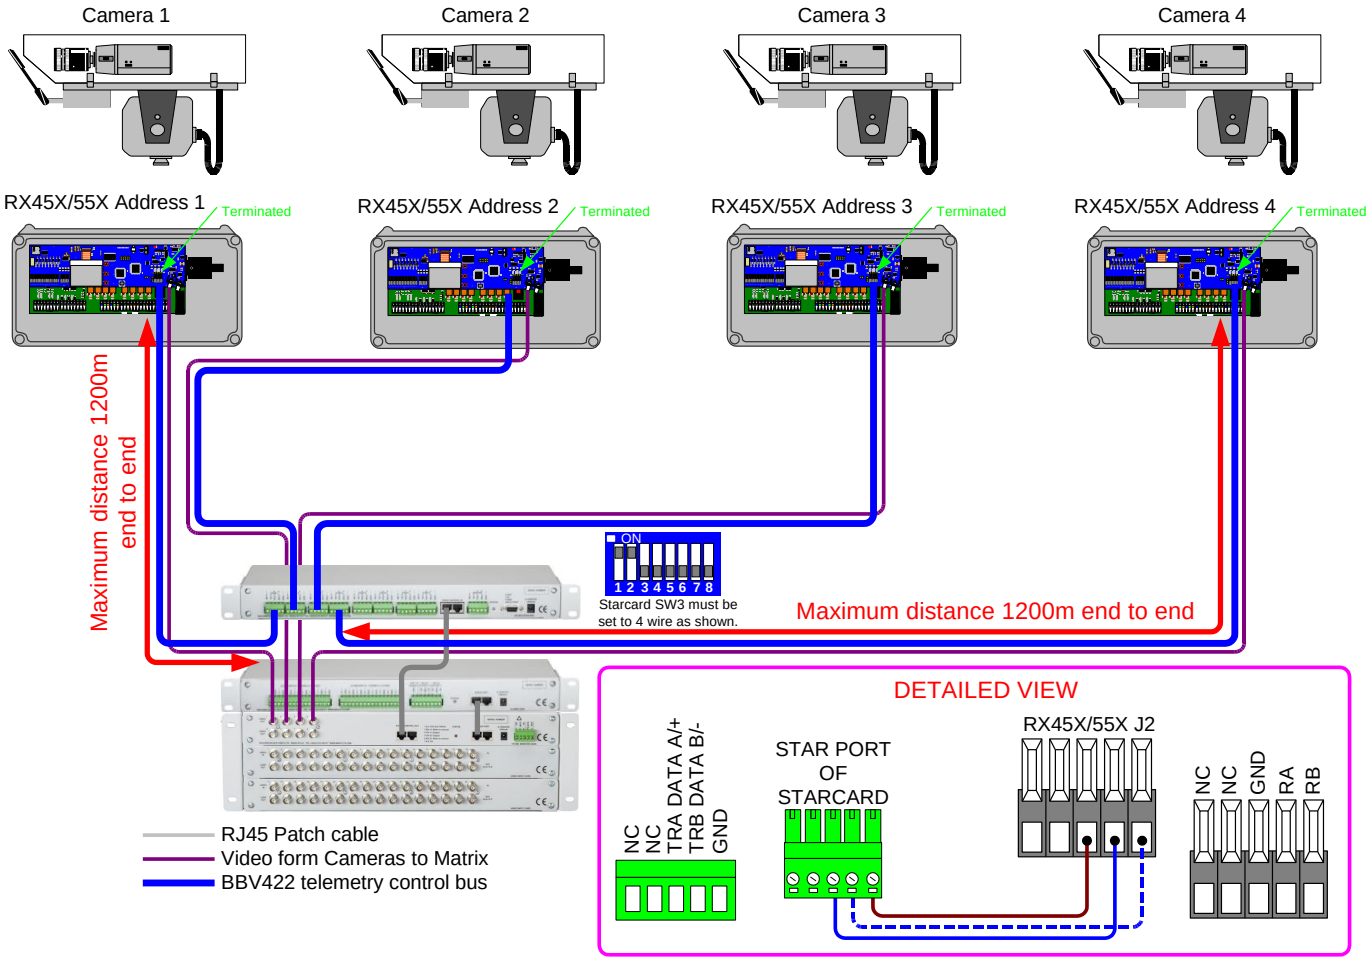

Fig 12. Star Wired Configuration using the optional BBV starcard

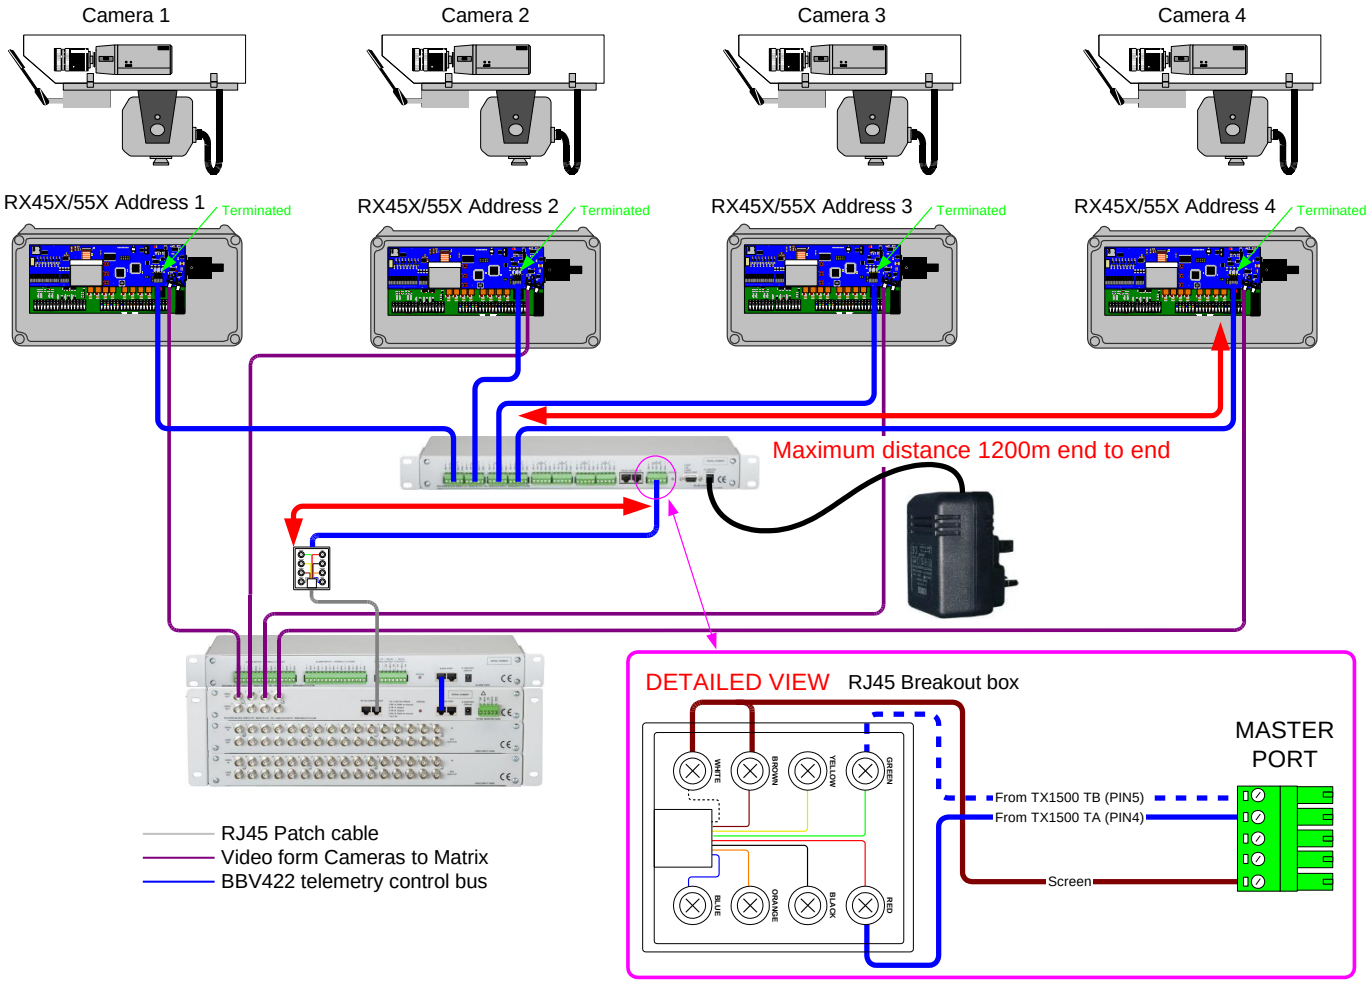

Fig 13. Use of starcard mounted remotely, reducing cable runs

VIDEO INPUT CARD

The Video Input Card is used to connect 16 camera inputs to the TX1500. Systems larger than 16 cameras will use multiple cards. The input cards are self addressing.

Each input has a corresponding looping output on the lower BNC connector. The camera inputs are passively terminated at 75Ω and auto de-terminate when a BNC plug is connected to the looping output. Up to 6 cards can be connected in a matrix to control up to 96 cameras.

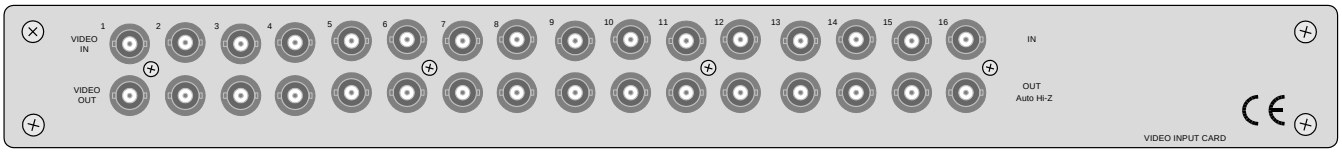

Video Input card Front Panel View

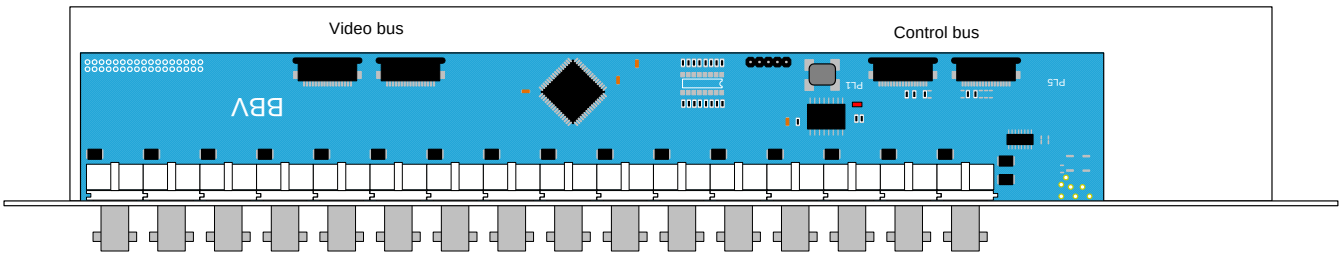

The address of each input card is dicated by its location that with in the matrix. In earlier matrixes, dipswitches were used, these are refered to as MK1 input cards and are not compatible with this type of input card a MK2.

MONITOR OUTPUT CARD

This card provides the 8 monitor outputs, BBUS, RS422 telemetry and a relay output.
Internal switches are used during specific BBV tests that should not require on site adjustment.

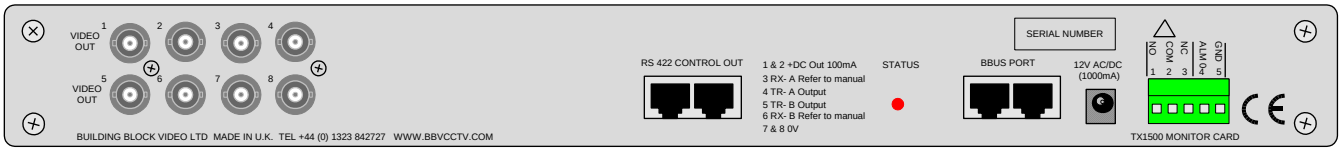

Monitor Output card Front Panel View
Monitor outputs tested via CRT Monitors, recommended maximum cable (RG59) distance from matrix = 25 meters. TFT Monitors may require additional amplification.

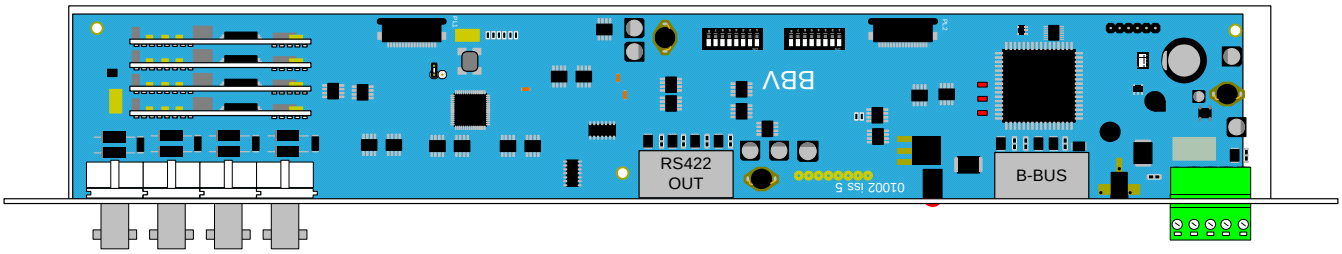

Monitor Output card internal view

LD1 STATUS – Front Panel indication system and BBUS operation. Refer to page 16.
Internal LEDs,
LD2 – BBV debug use.

For normal operation the internal switches must be as shown below:

SW1



B-BUS RS485
ON = Terminated
OFF = Un-terminated

SW2



RS485 Telemetry
ON = Terminated
OFF = Un-terminated

To reset system to factory defaults:- Power off the TX1500, set the switches as below and power up the TX1500. On screen instructions are displayed on monitor 1 output.

Power Up Factory Reset

SW1



SW2



NOTE: The Power Up Factory Reset option will delete all TX1500 parameter programming.
Contact BBV technical support for guidance. +44(0)1323 444600.

CHANGEOVER RELAY
operated by the triangle key
Volts free contacts for low voltage switching only



Alarm 00 input can trigger one of several actions, refer to page 19
Input from volts free, normally closed contacts

96 CAMERA SYSTEM SUBRACK CARD CONFIGURATIONS

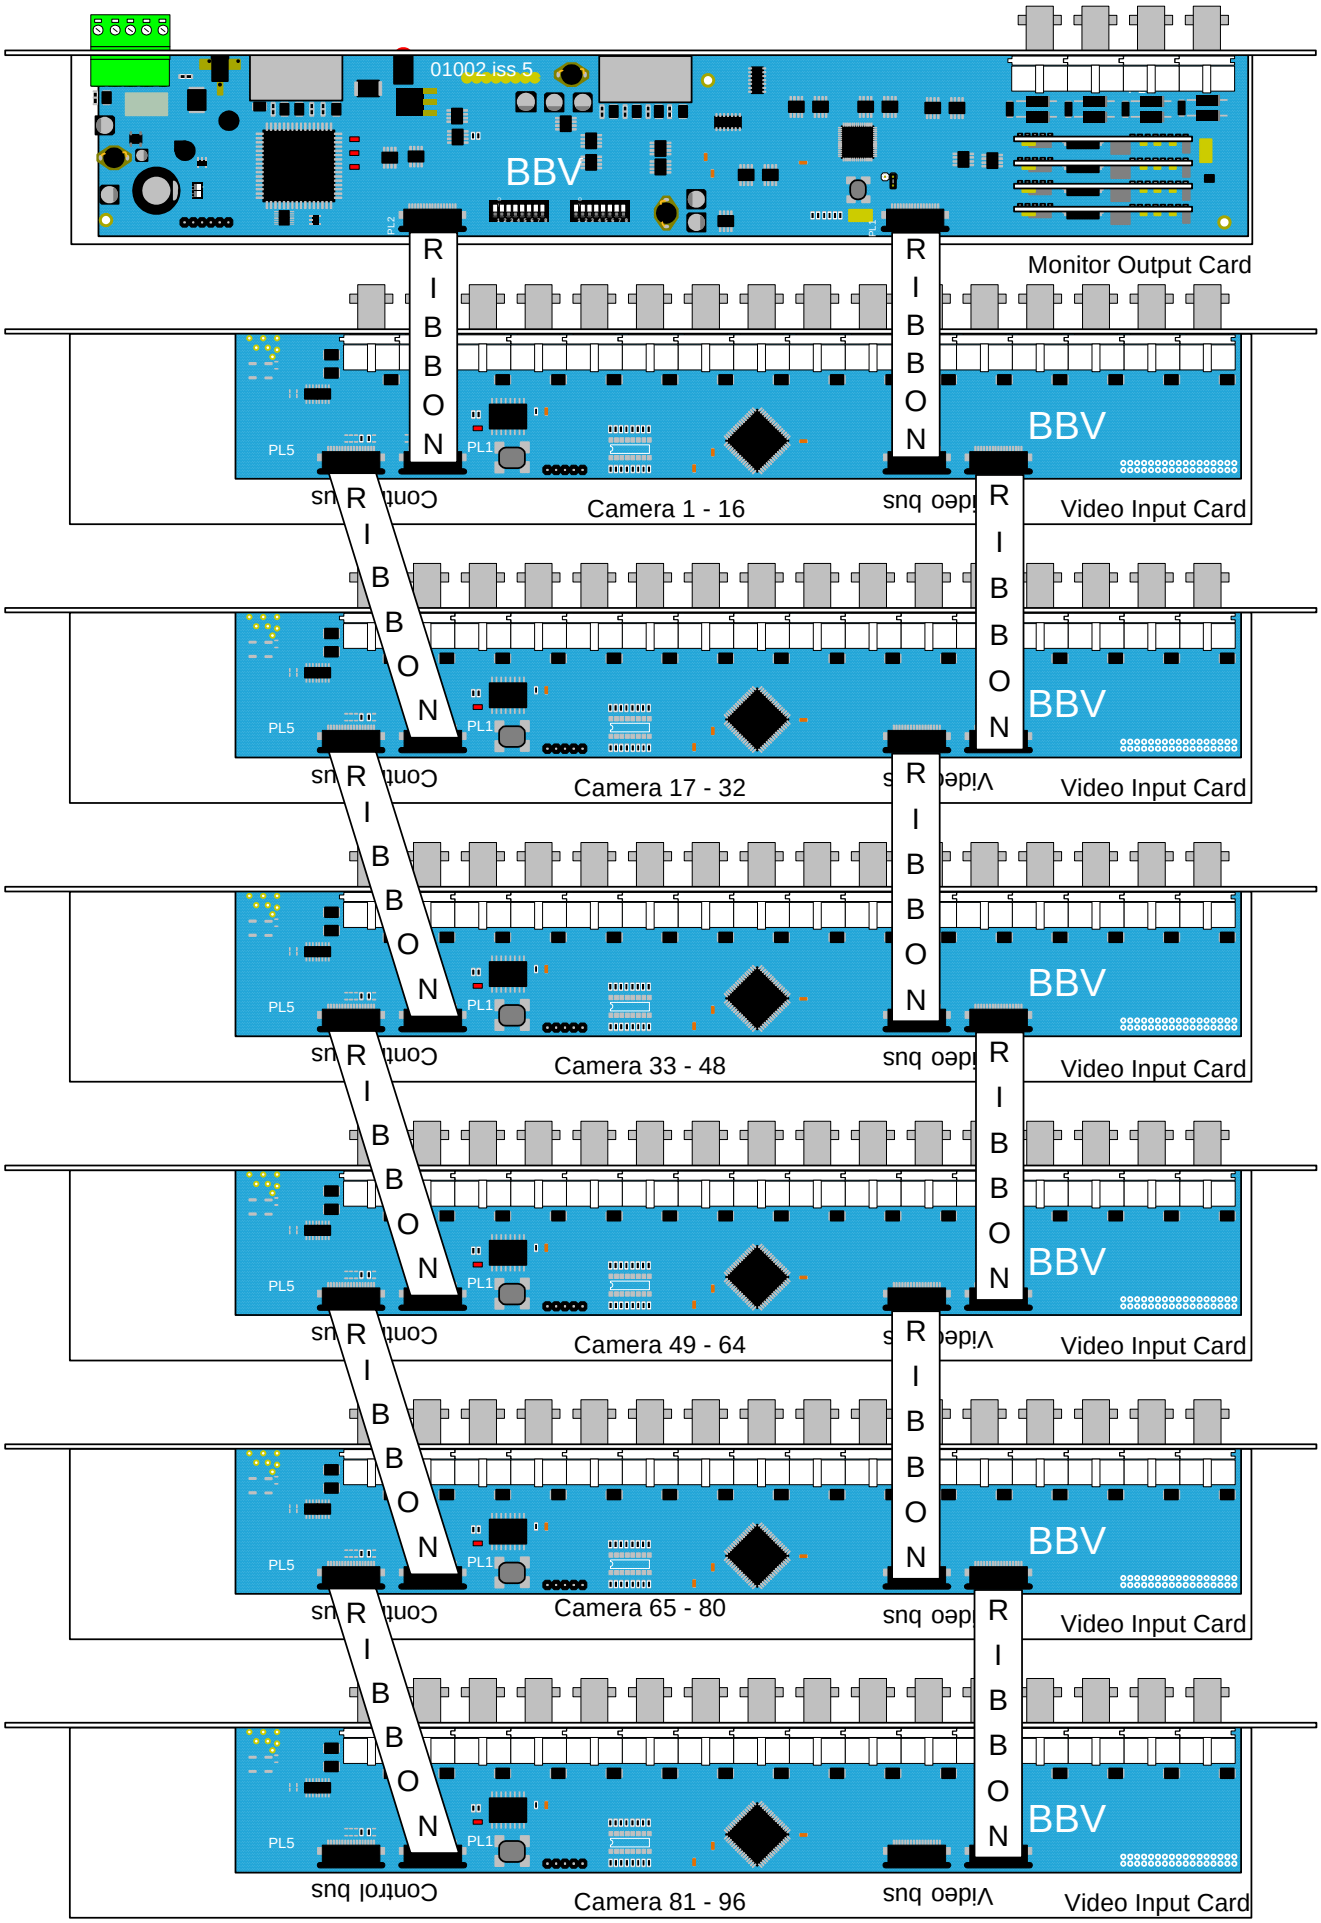

Wiring for Video Input cards and the Monitor Output card.

MATRIX DIAGNOSTICS

The matrix STATUS led indicates system operation as follows:

Flashing Dimly	The matrix is powered with at least one Keyboard connected. Use 58# to display the Keyboard numbers that the matrix has detected on the BBUS.
Mainly OFF, 1 second ON	The matrix is powered with no Keyboards connected. – If Keyboards are connected then make sure that each Keyboard address is unique between 0 – 3. Keyboards sharing an address will cause the matrix to ignore both Keyboards with unpredictable results.
OFF	The matrix is powered with no Keyboards connected or the matrix is not powered or has an internal fault. If the power supply seems fine then please contact technical support for further assistance.

Several commands exist that allow on site diagnostics. These commands must be entered from Keyboard 1 and display results on monitor output 1.

51# Display the matrix firmware version, number of resets and watchdog resets.
TX1500 Version shows the matrix firmware version number ie 2.3
resets show the number of times that the system has lost power or the menu has been accessed.
watchdogs show the number of times the matrix watchdog has reset the matrix. A high figure here can indicate that there may be interference or power fluctuations.

55# Coaxial telemetry on.
With normal operation, the coaxial telemetry is only transmitted to a receiver whilst a camera is being controlled. After a short period the telemetry transmission is stopped. This is prevent interference to sync separators in DVRs etc. When trouble shooting telemetry problems the telemetry should be on all the time so the 55# command would be used and then the receiver CABLE and ERROR leds inspected. Pressing # again will stop the telemetry transmission.

56# Display the status of matrix switch SW1, the display shows a HEX number which corresponds to the switch settings for SW1. The number is displayed whilst the # key is pressed. Releasing the # key will clear the number from the screen.

Number displayed	SW1 switch
0	1 - 6 OFF
1	1 ON
2	2 ON
4	3 ON
8	4 ON
10	5 ON
20	6 ON

When more than 1 switch is ON then the number displayed will the sum of the values of all switches that are ON, ie. 1,2 ON, display shows 03, 1,2,3,4 ON displays 0F
RS422 telemetry directly from the TELEMETRY port and should not normally be selected.

Example numbers that could be displayed
0 = normal mode
1 = DIXONS mode – This is a special mode developed for DSG driving Mark Mercer

57# Display the status of matrix switch SW2 as per 56#.
2A = SW2-2/4/6 ON = FACTORY INITIALISATION on a power up. This is used to clear any programming and load default values. Useful if the matrix has had a corrupted programming. Once powered up turn all SW2 switches OFF again to prevent further accidental initialisations.

58# Display number of Keyboards or BBUS/I-F with addresses connected to the matrix along with the software version of each Keyboard or BBUS/I-F.

TX1500/AL16 - 16 ALARM INPUT CARD

Each alarm card provides 16 individual normally closed volts free alarm inputs. The card communicates via the BBUS with the monitor output card. Power is supplied either via the BBUS interface when the alarm card is mounted in the TX1500 subrack or via an external 9Vdc supply when mounted remotely.

NOTE: Only 1 alarm card can be powered from the BBUS port.

The power led is used as a status indication and shows the following:
Mainly ON, flashing OFF when the alarm card is polled, approx 2-3 times every second. (NORMAL)
OFF permanently – alarm card not powered or faulty.
ON permanently – Not polled by MONITOR card, BBUS cable faulty or ALARM card faulty.

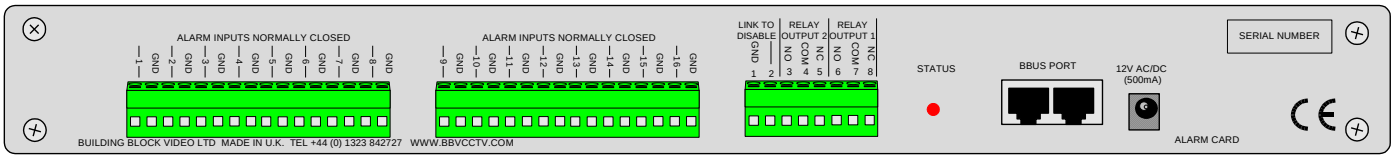

Fig 23. Alarm card front panel view

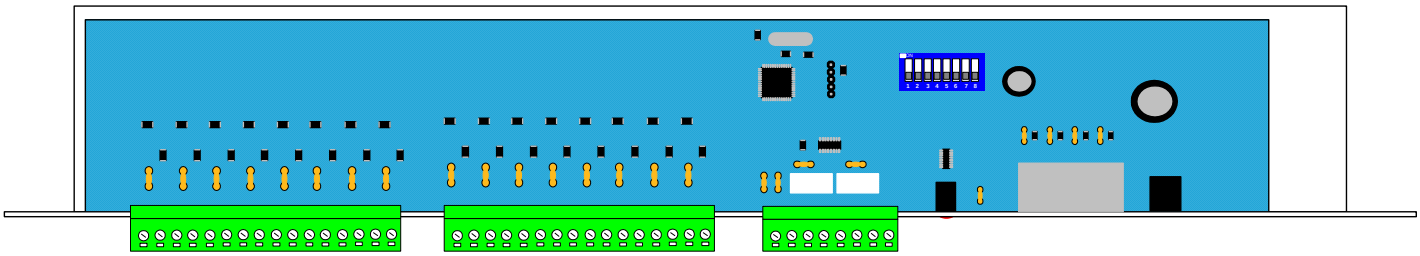

Fig 24. Alarm card internal view

SW1 is used to set the alarm card address as follows:

Card 1 alarm 1-16 Card 2 alarm 17-32 Card 3 alarm 33-48

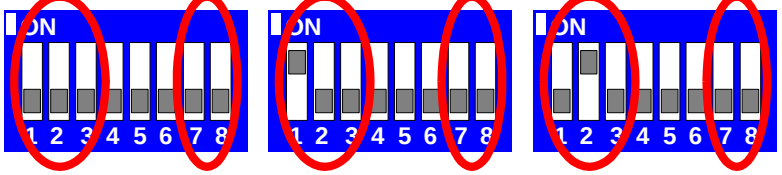

Switches 7 & 8
BBUS RS485 Termination
ON = Terminated
OFF = Un-terminated

Card 4 alarm 49-64 Card 5 alarm 65-80 Card 6 alarm 81-96

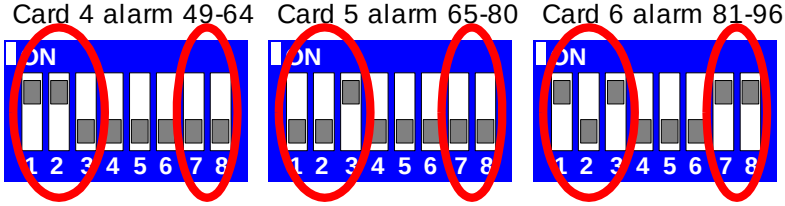

Must be ON if the alarm card is at the end of line and OFF otherwise

Alarm card 6 shown as end of line

Fig 25. Alarm card SW1 address switch settings

Each alarm card has two single pole changeover relays called Relay 1 and Relay 2. These relays can be driven manually and also from alarm activations. The system relay numbers are assigned as follows:

Alarm Card	**Relay 1**	**Relay 2**
1	1	2
2	3	4
3	5	6
4	7	8
5	9	10
6	11	12

Note: alarm card relay 1 cannot be controlled from the keyboards as it is an alarm output contact that changes state when any alarm becomes active. This allows it to be used to switch a VCR into realtime recording etc. The duration is set in the matrix menu. – **Relay 1 Time**

CONFIGURATION USING THE TX1500 MENUS

NOTE only Keyboard 1 can access the TX1500 system menu and only monitor 1 can display the menu.

Out of the box the TX1500 is configured to control BBV coaxial telemetry on all cameras and all Keyboards can control all the monitors and cameras.

The TX1500 menu system allows the unit to be configured to your customer's site requirements.

To access the menu select monitor 1 by pressing '1' 'MON' and use Keyboard 1. Press and hold the 'PROGRAM' key for 2-3 seconds and the following screen will be displayed and the 'PROGRAM' led is lit. If the menu is not displayed then check that the program key is enabled on the Keyboard. Refer to the guide on Page 31.

Press for 2 seconds

The menu is displayed and the PROGRAM led becomes red.

```
  Enter Pin Number

  * * * * * *

  + or - = Enter Key
  Joystick to Navigate
  Press Program to exit

Exit
```

Enter the six digit PIN using keys 0 – 9.

The default PIN is 999999

Use the joystick left and right if a digit is entered incorrectly.

The TX1500 Main Menu is displayed if the PIN is correct otherwise the TX1500 reverts to normal control.

```
TX1500 - Main Menu

System Basics
Access Tables
Alarm Menus
Sequences
Camera Types
Set Passwords
System Parameters

Exit    press + to select
```

To navigate through the menu, use the joystick and either the +/- keys to toggle a value or the numeric keys 0-9 if a value is required.

To exit the menu press the PROGRAM key at any point.

Each menu item is described on the following pages

SYSTEM BASICS

```
System Basics

Maximum Camera number    10
Maximum Alarm number     16
Text on Monitors    1+2+3+4
Display Line              9
System Type             PAL
Number of Keyboards       2

Return
```

This example screen shows the settings for a site with 10 cameras, 2 Keyboards and a single alarm card with 16 alarm inputs.

Maximum Camera number:
Specifies how many video inputs are connected to the matrix and prevents switching to non-existent cameras. Valid values are 01 - 96

Maximum Alarm number:
Specifies how many alarm inputs are connected to the matrix. Set as below:-

Alarm cards	Maximum Alarm number
0	0
1	16
2	32
3	48
4	64
5	80
6	96

Text on Monitors:
Monitor outputs 1 – 4 display the camera number, monitor number and other messages. Text on these monitors can be disabled by using the + or – key to cycle through options.

Display Line:
The TX1500 status line can be moved up or down on the screen to prevent the TX1500 text from being overwritten by the text from other components of the system. Use +/- to cycle through values.
0 being the top of the screen and 10 the bottom of the screen.

System Type:
Sets the CCTV video standard as PAL or NTSC. Use the +/- keys to select the standard. Normally PAL in the UK.

Number of Keyboards:
Sets the number of Keyboards connected to the matrix

Return:
Returns to the TX1500 Main Menu.

ACCESS TABLES

One of the advanced features of the TX1500 system is the ability to prevent specific cameras from being displayed on specific monitors and to prevent specific Keyboards from moving cameras.

The Access Table screen is used to program which monitors each Keyboard can control. A setting of 'Y' is used if the Keyboard is allowed to control a monitor and 'N' to prevent control.

```
Access Table
Keyboard to Monitors

             1 2 3 4 5 6 7 8
1 Tx 1500 v6 Y N N N N N N N
2 Tx 1500 v6 N Y N N N N N N
3 Not Fitted N N N N N N N N
4 Not Fitted N N N N N N N N


Return
```

This screen shows the settings for a site with two Keyboards. Each Keyboard has it's own monitor and is locked out of controlling the other Keyboard's monitor.

i.e.
Keyboard 1 can control monitor 1 ONLY
Keyboard 2 can control monitor 2 ONLY

Pressing the +/- keys will toggle the value of each monitor between Y and N.

NB: Keyboard 1 can always control monitor 1 as this is used to setup the matrix.

On power up the matrix interrogates devices on the BBUS and all control devices are displayed on this screen. Recognised control devices are:-.

Displayed	Description
TX 1500	Standard TX1500 joystick Keyboard
TCommand	Touch Screen Keyboard
232 I/F	BBUS Interface allowing control from PC and from remote sites etc.

Allocating cameras to monitors and Keyboards is programmed from the Camera Types screen.

ALARM MENUS

Alarm handling of the TX1500 is programmed from the Alarm Menu screens.
Up to four actions can be carried out following each alarm activation. Eg four cameras could move to preset positions to triangulate onto an event.

On selection of Alarm Menus the following screen is displayed

```
You have 16 alarms
enabled and connected

Edit Alarm number  00
Input Action     Disable Alm
Alarm Beep Time    6 Seconds
Alarm Stack        Automatic
Relay 1 Time      60 Seconds


Return
```

This example shows a system with a single 16 input alarm card.

The TX1500 will display the total number of alarms that can be programmed based on the Maximum Alarm number set in the System Basics menu.

Input Action:
Sets the action for the ALARM 00 input on the matrix monitor board. Use +/- to cycle through the options.
No Action – ALARM 00 is not used.
Disable Alm – is used to disable all alarms when ALARM 00 is shorted to GND.
Alarm 00 – ALARM 00 is used as an alarm input in addition to the TX1500/AL16 alarm card inputs.
NOTE: Always handled in 'AUTOMATIC' mode, regardless of 'Alarm stack' setting.

Alarm Beep Time:
Number of seconds that all the Keyboards 'beep' following an alarm input. Use +/- to cycle through the values.
0, 4, 6, 8, 10, 15, 20 Seconds

Alarm Stack:
The matrix alarm handling can be automatic, ie the system will drive cameras to presets as alarms occur or require an operator input before the alarm is actioned. Use the +/- to toggle between Automatic and Manual.
Automatic – Alarm activations are handled automatically
Manual – The ALARM key must be pressed to acknowledge an alarm activation

Relay 1 Time:
The number of seconds that the Relay 1 output of alarm card 1 is active following any alarm.
Use +/- to cycle through the various time delays. 10, 30, 60, 90, 120, 150, 200 or 250 seconds.

Enter the 2 digit alarm number you wish to program using the 0-9 keys. Eg enter 01 for alarm 1. The following screen will then be displayed. See the relay number mentioned on page 17.

```
Alarm  1
        kbd cam mon pre time
Act      1  01   1   01  30s

No Act   1  01   1   00  30s

No Act   1  01   1   00  30s

No Act   1  01   1   00  30s

Return    Exit next  prev
```

Each of the four actions can allow a camera to be moved to a preset position and displayed on a monitor output. In addition, if the monitor was sequencing before the alarm occurred, after '**time**' seconds the sequence is re-started.

If alarms are taken into the local alarm input of a telemetry receiver that supports local alarms, ie Rx10X/Rx400DC/Rx45X/Rx55X, '**pre'** must be set to 00 as the preset will depend on the receiver alarm input. *(See the receiver manual for more details on local alarms.)*

This simple example shows alarm 1 moving camera 1 to preset 1 and display on monitor 1.

next and **prev** allow setting the alarm actions for the next and previous alarm inputs.

SEQUENCES

Each of the 8 monitor outputs of the TX1500 can sequence between all or specific cameras. Each camera can be individually added or removed from each monitor sequence. For example, in a retail environment public store monitors are prevented from displaying sensitive areas of the store whilst monitors in the security office can sequence all cameras.

```
Sequence Setup Selection

Cameras 01 - 08
Cameras 09 - 16
Cameras 17 - 24
Cameras 25 - 32
Cameras 33 - 40
Cameras 41 - 48
Cameras 49 - 56
Cameras 57 - 96
Return
```

If a camera greater than the Maximum Camera Number is added to a sequence this camera will be ignored when the sequence is running.

Selecting Cameras 01 – 08 will display the following screen

```
monitor sequence setup
          cam    1234    5678
1  2 Second     YYYY    YYYY
2  5 Second     YYYY    YYYY
3 15 Second     YYYY    YYYY
4 20 Second     YYYY    YYYY
5 25 Second     YYYY    YYYY
6 30 Second     YYYY    YYYY
7 Full Rand     YYYY    YYYY
8 Random        YYYY    YYYY
Return        Menu     Next8
```

Monitors 1 to 8 are shown with monitor 1 the top line and monitor 8 the bottom line.

The first item is the type of sequence or the dwell time if running a standard sequence. The screen on the left shows all the variants of sequences and dwell times.

Sequence types:

2/5/15… Second – standard sequence with a dwell time before displaying the next camera.

Random – The cameras are sequenced as above from lowest to highest but with a random dwell time between each camera.

Full Rand – In Full Random the monitor will display a completely random camera for a random period of time. This is useful for public display monitors on shop floor to prevent shoplifters remembering the displayed sequence.

A camera will be in a specific monitor's sequence if a Y is displayed or be skipped if an N is displayed.
Use the + or – keys to toggle between Y and N.

Next8 displays the next bank of 8 cameras.

CAMERA TYPES

These screens are used to set the type of telemetry for each camera and which monitors and Keyboards are allowed to view and control each camera.

```
Camera Setup Selection

Cameras 01 - 08
Cameras 09 - 16
Cameras 17 - 24
Cameras 25 - 32
Cameras 33 - 40
Cameras 41 - 48
Cameras 49 - 56
Cameras 57 - 96
Return
```

The cameras are again displayed in banks of 8 as shown on the following screen:

Start at Cameras 01 – 08 to display the setup screen

```
Camera 01-08  Kbd  Monitor
              1234 12345678
01 BBV coax   YYYY YYYYYYYY
02 BBV coax   YYYY YYYYYYYY
03 Static     YYYY YNYYYYYY
04 BBV coax   YYYY YYYYYYYY
05 BBV 422    YNNN NYNNNNNN
06 BBV coax   YYYY YYYYYYYY
07 Unused     YYYY YYYYYYYY
08 Unused     YYYY YYYYYYYY
Return         Menu   Next8
```

This example shows Camera 1,2,4 & 6 with coax telemetry and able to be viewed on all monitors and controlled from all Keyboards.

Camera 3 is a static camera that can be viewed on all monitors apart from monitor 2.

Camera 5 is driving via BBV RS422 and can only be viewed on monitor 2 and controlled by Keyboard 1.

Cameras 7 & 8 are unused.

The choices for camera type are:

BBV coax - Standard BBV up-the-coax telemetry (Rx10X/200/300/400P/Rx45X & Rx55X)
BBV 422 - BBV RS422 telemetry also used when driving additional protocols via a StarCard/converter
VCL coax - Control only available on monitors 1-4 ***this is a limited implementation of the Protocol***
PEL coax - Control only available on monitors 1-4 ***this is a limited implementation of the Protocol***
VISTA cx - Supports VISTA POWER DOME and other Domes VISTA range.
Contact support for more information
VISTA TP - Supports VISTA POWER DOME and other Domes VISTA range.
Contact support for more information
STATIC - Telemetry is disabled
Unused – The camera is not fitted and can't be viewed manually or in a sequence.
Other types may be selectable, please check with BBV before choosing these.

BBV coax would be used to control the existing range of BBV up-the-coax receivers.
Rx10X for dome control. RX200/300/400P/45X for AC heads, RX55Xfor high/variable speed 24Vdc heads.
The maximum distances that should be used are: 250M of RG59 and 500M of CT125 grade cable.
BBV 422 is used to drive the new advanced range of addressable BBV receivers that are controlled using two wire RS422. The RX45X is used when driving AC pan/tilt heads and the RX55X is used for high/variable speed 24Vdc heads. Both receivers offer additional features including an On Screen Display with an advanced menu system, 8 local alarm inputs, wide input supply, DIP switch addressable allowing either star or daisy chained wiring.
Selected 3rd party domes and telemetry receivers can be controlled via RS422 and a BBV STARCARD/CONVERTER. The camera type must also be set to BBV 422.
Full details can be found on the BBV web site www.bbvcctv.com

Kbd: If a Keyboard is allowed to control the camera, select Y, or if the Keyboard can only view but not control the camera, select N.
Monitor: Select Y if the camera can be displayed on each monitor or N if not. This allows cameras to be hidden from specific monitors/operators.

VISTA Coax Extended Commands on the Tx1500Matrix

Supports 86 Presets Presets 1 thought to 88 except 33 & 34

Keyboard	***VISTA COAX Command***	*Keyboard*	***VISTA COAX Command***
91 Preset	***RUN Learn 1***	1 Patrol	***RUN Tour 1***
92 Preset	***RUN Learn 2***	2 Patrol	***RUN Tour 2***
93 Preset	***Program Learn 1***	Iris Open	***Enter***
94 Preset	***Program Learn 2***	Iris Close	***ESC***

1# ***Enter Dome Menu (min idome) VPD-4WP-P-C/L***
1# 1# ***Enter Dome Menu (VISTA POWER DOME)***

DomeMENUPassword“1234”

On the **VPD-4WP-P-C/L** if you press the Autopan Key nothing will happen until you either:
i) Press the Iris close and it will start a ***dome scan*** if saved.
ii) Use the joystick and it will go in to the menu ***Password screen***.

RS422 (simplex) TELEMETRY OUT

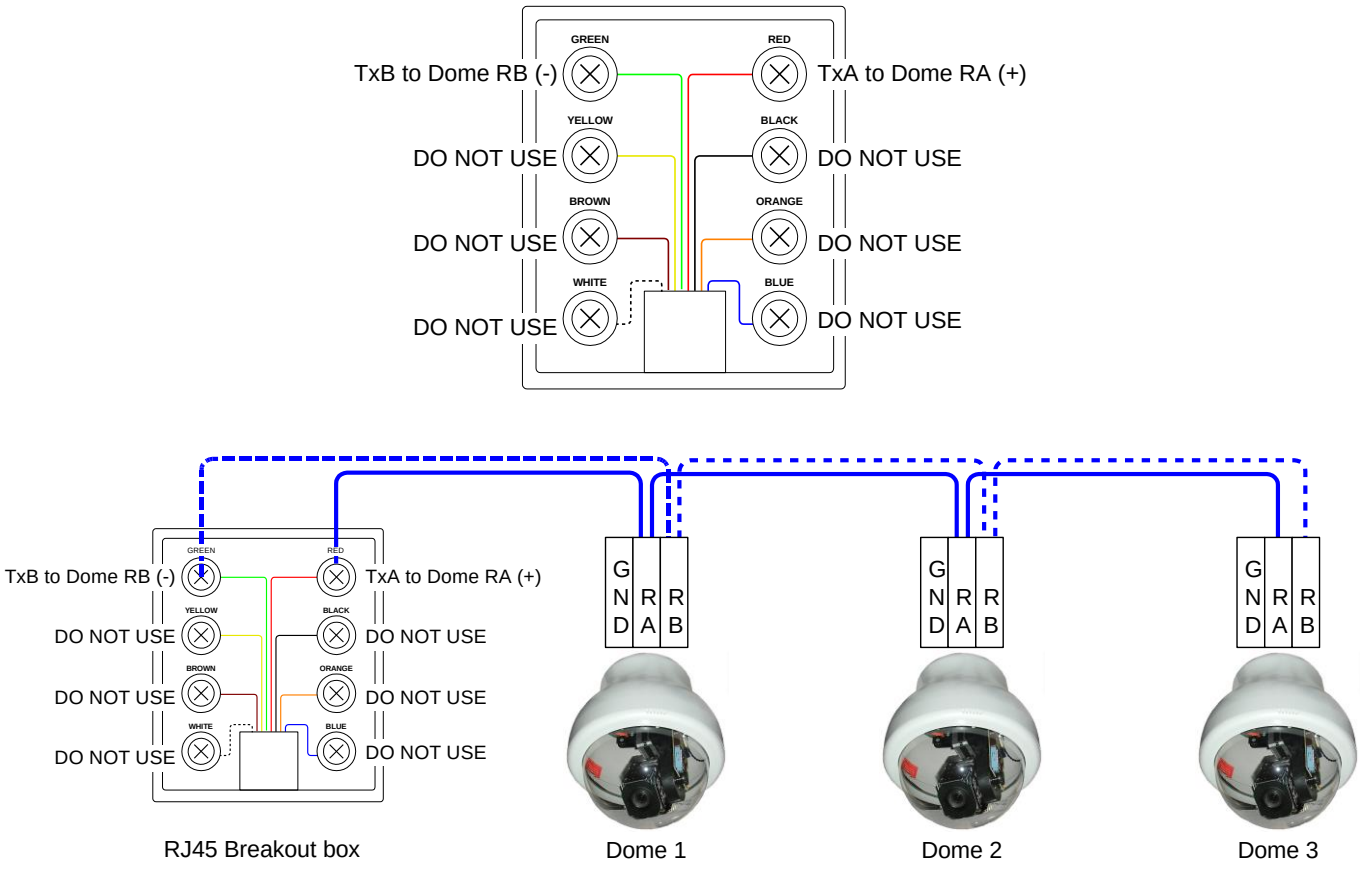

This port provides telemetry control via BBV RS422 (simplex). A Cat 5 RJ45 patch cable and breakout box is used to connect the VISTA DOME CAMERAS via single twisted pair cable. It is possible to either wire the network in a daisy chained or star configuration using an optional RS422 Starcard.

Telemtry Function

Protcoal	BBV coax	BBV485	VCL coax	Pelco coax	VISTA coax	VISTA 485 TP
Maximun cable Distance	250M RG59 500M CT125	1200M BELDEN 8723	250M RG59 275M CT125	250M RG59 275M CT125	250M RG59 275M CT125	1200M BELDEN 8723
1#	REFER TO RECEIVER MANUAL	REFER TO RECEIVER MANUAL	N/A	ENTER DOME MENU	ENTER DOME MENU	ENTER DOME MENU
2#	REFER TO RECEIVER MANUAL	REFER TO RECEIVER MANUAL	N/A	180 FLIP	EXIT DOME MENU	EXIT DOME MENU
3#	REFER TO RECEIVER MANUAL	REFER TO RECEIVER MANUAL	N/A	N/A	AUTOPAN	Menu Esc Key no Shift
4#	REFER TO RECEIVER MANUAL	REFER TO RECEIVER MANUAL	N/A	SOFT RESTART	RESET DOME	Menu Esc Key with Shift
5#	N/A	N/A	N/A	N/A	N/A	Freeze off
6#	N/A	N/A	N/A	N/A	N/A	Freeze on
7#	N/A	N/A	N/A	N/A	N/A	Color Mono toggle
8#	N/A	N/A	N/A	N/A	N/A	180 Flip
9#	N/A	N/A	N/A	N/A	N/A	Auto Focus toggle
10#	N/A	N/A	N/A	N/A	N/A	Auto Iris toggle
Number of Presets Spproted	16	32	99	32	86 1 through to 88 except 33 & 34	32
GOTO 33 PRESET	N/A	N/A	180 FLIP	N/A	N/A	N/A
GOTO 80 PRESET	N/A	N/A	AUTOFOCUS ON	N/A	N/A	N/A
GOTO 81 PRESET	N/A	N/A	AUTOFOCUS OFF	N/A	N/A	N/A
GOTO 91 PRESET	N/A	N/A	N/A	N/A	RUN Learn 1	N/A
GOTO 92 PRESET	N/A	N/A	N/A	N/A	RUN Learn 2	N/A
GOTO 93 PRESET	N/A	N/A	N/A	N/A	Program Learn 1	N/A
GOTO 94 PRESET	N/A	N/A	N/A	N/A	Program Learn 2	N/A
GOTO 99 PRESET	N/A	START AUTOPAN	START AUTOPAN	START AUTOPAN	START AUTOPAN	N/A
Iris Open	N/A	ENTER WHEN IN THE MENU	N/A	ENTER WHEN IN THE MENU	ENTER WHEN IN THE MENU	N/A
Iris Close	N/A	N/A	N/A	N/A	ESCAPE	N/A

SET PASSWORD

```
TX1500          version  3.5

Change Pin Number

New Pin Number   ******
Confirm Number   ******
Download
Upload
Initialise System

Return    Exit
```

The default menu password of 999999 can be changed using this screen.
MAKE A NOTE OF THE NEW PIN.

The matrix software version is displayed at the top of the screen.

Select the New Pin Number area and type the new PIN. Move to the Confirm Number area and retype the PIN.
If the numbers match then a confirmation screen is displayed. Select EXIT to return to normal operation.

Upload
This feature stores the system parameters onto a pc to allow for backup. Data is transferred via the telemetry port. Connection to a normal serial com port is made through a BBV RS232 Kit. PC application software is called 'UP_DOWN_GUI' and is available on the BBV website at www.support.bbvcctv.com or contact support

Download
This feature restores the system parameters from a pc. Data is transferred via the telemetry port.

Initialise System:
Cause the entire matrix programming to be deleted and default settings used.
This function must be used with great care, as ALL programming will be lost.

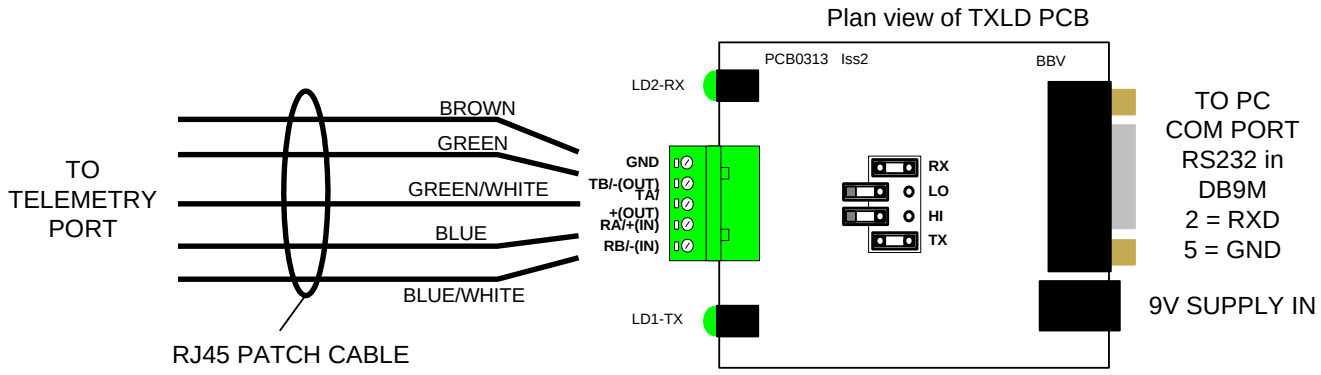

UPLOAD/DOWNLOAD CONNECTION TO PC

SYSTEM PARAMETERS

Used to program additional settings as follows:

```
System Parameters

System Parameters 2

Menu Timeout       60 Seconds
Program Timeout    20 Seconds
Lockout Delay      10 Seconds
Relay 0 Action      Latching

Return
```

System Parameters 2:
Displays the 2nd page of system parameters.

Menu Timeout:
Number of seconds of inactivity before the menu is automatically exited. Use +/- to cycle through values.
15, 20, 40, 60, 80, 100, 120, 150, 180, 200 or 250 seconds.

Program Timeout:
Number of seconds the Keyboard will stay in programming mode after the PROGRAM key is pressed. This is to prevent preset positions from being overwritten accidentally. Use +/- to cycle through values.
15, 20, 40, 60, 80, 100, 120, 150, 180, 200 or 250 seconds. It is recommended that a short time is selected.

Lockout Delay:
Number of seconds that the PTZ control of a camera is locked out after the last movement command. Used to prevent two Keyboards from 'fighting' for control of the same camera. Use +/- to cycle through values.
3, 5, 8, 10, 12, 15, 20, 30, 40, 60, 80, 100 or 250 seconds. 10 seconds would be an appropriate value.

Relay 0 Action:
Latching – Pressing the Keyboard's TRIANGLE key will toggle the state of the monitor output card relay.
Momentary – The relay will switch whilst the TRIANGLE key is pressed and switch back again when the key is released.

SYSTEM PARAMETERS 2

Used to program additional settings as follows:

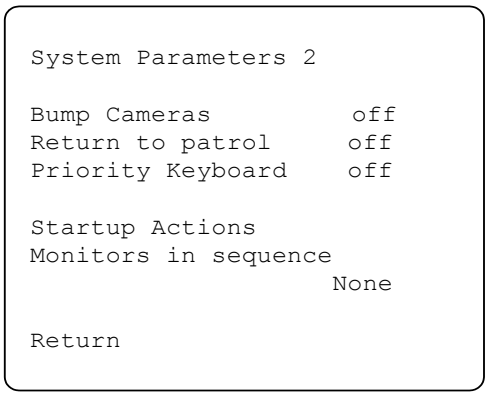

Bump Cameras:
Selects the Keyboard(s) that will remove the current camera from other monitors when controlled manually. This is to prevent, for example, public display store monitors from displaying cameras that are following a suspect.
Use +/- to cycle through options:-
Off, Kbd 1, Kbd 2, **Kbd 1 + 2**, **Kbd 3**, **Kbd 4**, **Kbd 1 + 2 + 3**, **Kbd 1+2+3+4**

Return to patrol:
If set to on, the current camera will start a preset patrol 1, if supported, when another camera is selected. This is useful for a system that has several cameras that should run preset patrols all the time that they are not controlled manually.

Priority Keyboard:
A Keyboard can be set that can take control of cameras at any time and is not locked out by other Keyboards.

Startup Actions – Monitors:
This option allows selected monitors to resume sequence should the system power fail and restore. Use +/- to cycle between the monitor choices.

None, **8**, **78**, **678**, **5678**, **45678**, **345678**, **2345678**, or **12345678.**

UP-THE-COAX RECEIVER SPECIFIC PROGRAMMING

To program specific features of Rx10X/200/300/400P/45X/55X up-the-coax receivers, the camera type must be set to BBV COAX. Press and hold the '#' key and tap the PROGRAM key to display the options. The PROGRAM key must be enabled. (see guide on Page 31)

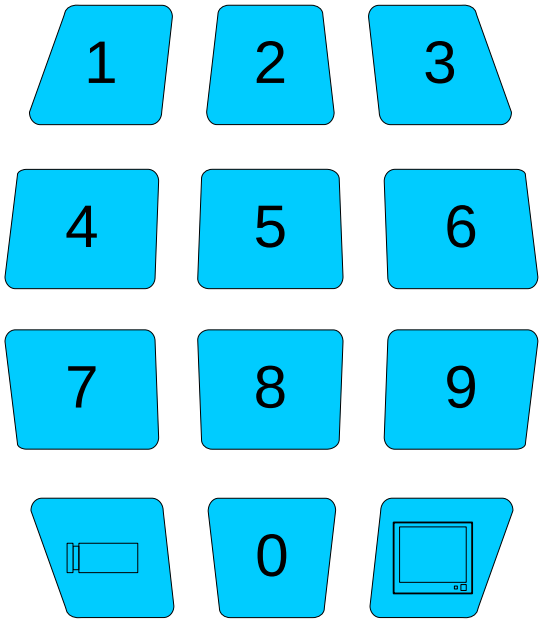

Press and HOLD # then press the PROGRAM





Use the number keys whilst following the on screen menu.

```
1 Program Preset
2 Self Test Receiver
3 Set Iris Level
4 Erase Preset
5 Remove Preset Patrol 1
6 Remove Preset Patrol 2
7 Change Patrol 1 Time
8 Change Patrol 2 Time
```

1 Program Preset 01-16
Enter 01 – 16 to program this preset position.
This is a legacy function to program a preset position and the preferred method is described on page 25.

2 Self Test Receiver
This will start the remote self test function, i.e. left/right/up/down etc on BBV up-the-coax receivers only.

3 Set Iris Level
Used with Rx300 and Rx400P to set the iris override output if fitted.

4 Erase Preset 01-16
Used to erase a preset from an Rx10X and RX400P. Enter 01 – 16 to erase the preset position.

5 Remove Preset Patrol 1
Enter 01 – 16 to remove the preset from preset patrol 1 with Rx10X and RX400P receivers

6 Remove Preset Patrol 2
As above but removes the preset position from patrol 2

7 Change Patrol 1 Time
Used to set the dwell time for patrol 1. 01 = RANDOM, 02 = 12 seconds, 03 = 24 seconds etc up to 16 = 180 seconds when used with Rx100 and Rx400P receivers.

8 Change Patrol
As above but relates to preset patrol 2.

The menu will timeout and the PROGRAM key LED will turn OFF after several seconds to prevent accidental reprogramming of the receiver.

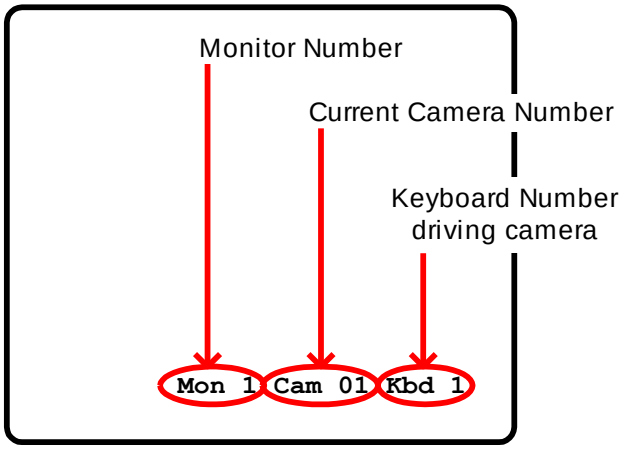

Monitor outputs 1,2,3 & 4 have an On Screen Display as shown on the left.

The Monitor number along with current Camera number is shown permanently.

Kbd is displayed whenever a Keyboard is driving a camera.

Monitor outputs 5,6,7 & 8 are not equipped with On Screen Displays and are generally used as spot, park or public display monitors.

SELECTING A CAMERA

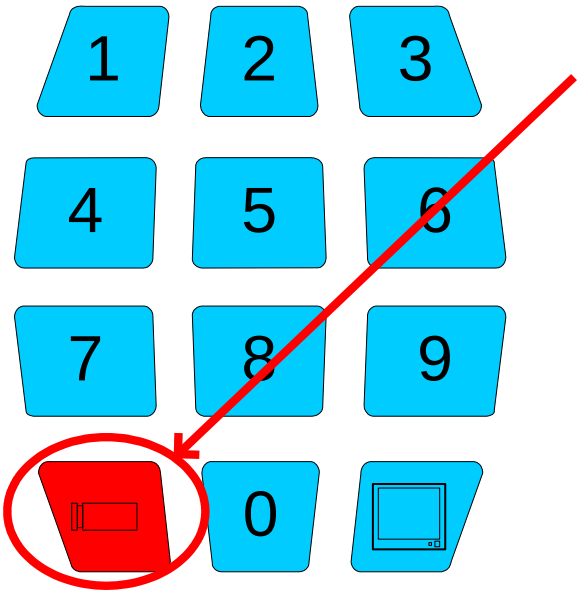

Use the number keys followed by the CAMERA key.

If the Keyboard and monitor are allowed to display the camera then the current monitor will now display this camera.

If not then the command is ignored.

Whilst the CAMERA button is RED, the + and – keys can be used to easily switch to the next or previous camera



NEXT CAMERA

PREVIOUS CAMERA

SELECTING A MONITOR

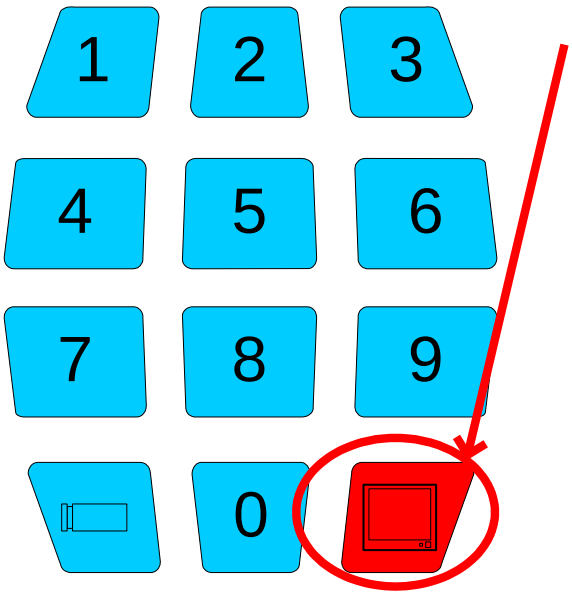

Use the number keys followed by the MONITOR key.

If the Keyboard is not allowed to control this monitor then the command is ignored.

Otherwise the Keyboard can now control the camera displayed on the new monitor

MOVING A CAMERA

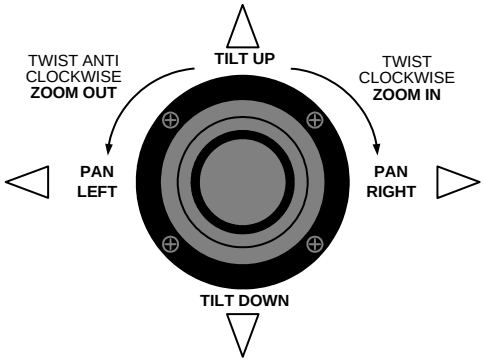

JOYSTICK

The joystick is used to pan and tilt the camera and drive the lens zoom.
Moving the joystick left and right will pan the camera and moving the joystick up and down will tilt the camera.
Rotating the joystick knob clockwise will zoom the lens IN and rotating the knob anti-clockwise will zoom the lens OUT.
The joystick gives variable speed control

LENS KEYS



There are four lens function switches on the Tx1500 keyboard. These are Iris Open, Iris Close, Focus Near and Focus Far.

Press a key for the desired function and release to stop.

AUXILIARY OUTPUTS

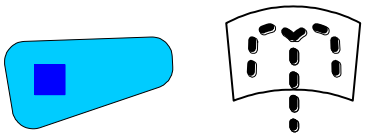

The WASH key is used to wash the camera housing's glass if the feature has been provided.



The WIPER key is used to toggle the camera housing's wiper ON/OFF



The function of the AUTOPAN key will vary depending upon the camera being controlled but mainly is used to make the camera either pan from end stop to end stop or to run a preset patrol. Moving the joystick left or right will turn autopan off.



The LIGHTS key is used to toggle any lights ON/OFF

GOTO PRESET POSITION

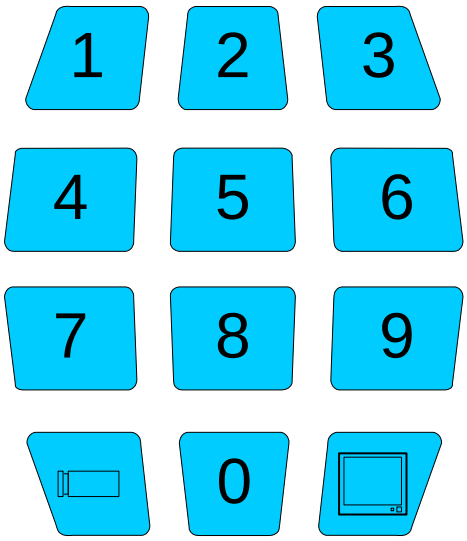

Use the number keys followed by the PRESET key.



Whilst the PRESET button is RED, the + and – keys can be used to easily switch to the next or previous preset position



NEXT POSITION

PREVIOUS POSITION

Preset positions are only available on moving cameras that are equipped for presets. Most will accept presets 1 – 16 although the TX1500 supports preset positions up to 99. This should be checked with your installing company.

PROGRAMMING A PRESET POSITION

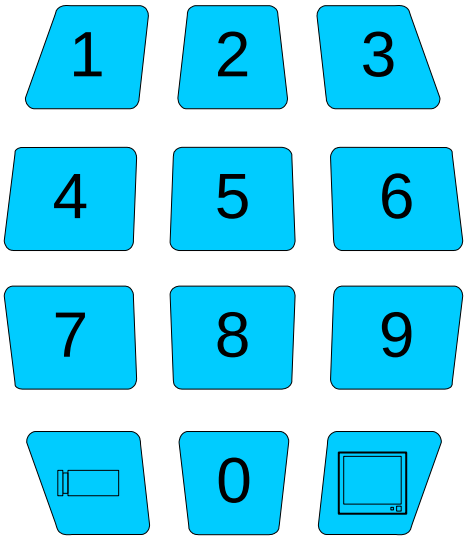

Press the PROGRAM key to turn the PROGRAM key RED. The unit is now in preset programming mode.



PROGRAM

If the LED doesn't light then this Keyboard has been prevented from programming presets by the installation company.
See Page 31

Use the number keys followed by the PRESET key to program the new preset position.



STARTING A PRESET PATROL

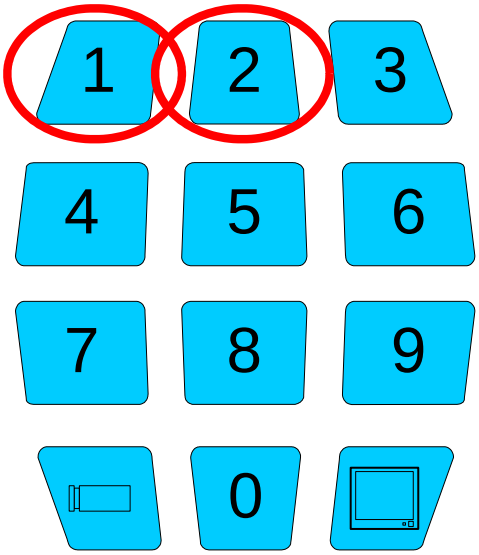

Press either 1 or 2 followed by the PATROL key.

The PATROL key LED will be RED whilst the current camera is running a preset patrol.

To stop the camera from patrolling, move the joystick. The PATROL key LED will now be BLUE.

As with presets, patrols are only available on moving cameras that are equipped for presets. Certain dome cameras offer enhanced patrol features that will be covered in the product addendum sheet for each specific dome type.

STARTING A MONITOR CAMERA SEQUENCE



Pressing the SEQ key will start a camera switching sequence on the current monitor. The SEQ key LED illuminates RED to indicate if the current monitor is running a sequence.

Each monitor can sequence individually and simultaneously.

The monitor sequence is programmed by the installation company using the system configuration menu.

To stop the sequence either press the SEQ key again to toggle the LED BLUE or select another camera.

BLUE SQUARE / RELAY KEY



Use the BLUE SQUARE key to operate the TX1500 change over relay on the monitor out card. This can be used for a variety of purposes (Exluding AL1 on card 1, this is a general relay). Your installation company will inform you of the specific function for your site.

The relays on each alarm card can also be switched as follows:

3 BLUE SQUARE – relay 1 alarm card 2
5 BLUE SQUARE – relay 1 alarm card 3
7 BLUE SQUARE – relay 1 alarm card 4
9 BLUE SQUARE – relay 1 alarm card 5
11 BLUE SQUARE – relay 1 alarm card 6

2 BLUE SQUARE – relay 2 alarm card 1
4 BLUE SQUARE – relay 2 alarm card 2
6 BLUE SQUARE – relay 2 alarm card 3
8 BLUE SQUARE – relay 2 alarm card 4
10 BLUE SQUARE – relay 2 alarm card 5
12 BLUE SQUARE – relay 2 alarm card 6

ALARM KEY



If the system has been configured for KEY PRESS alarms by the installation company, following a site alarm the ALARM key LED will be RED, the alarm monitor will display ‘alarm’ and the alarm Keyboard will beep.

The alarm is acknowledged by pressing the ALARM key. The alarm monitor/s will display the camera/s programmed for this alarm.

TX1500/KBD - System Keyboard

This Keyboard provides control of the system and any cameras connected to the matrix. The Keyboard communicates through an RJ45 connector using BBV TX1500 protocol at 9600 baud on an RS422 link.

The Keyboard requires 12Vdc supply, minimum current of 100mA. A single Keyboard can be supplied through a patch cable from the matrix. Multiple or remote Keyboards will need separate power supplies, which are supplied as standard with each Keyboard. Additional power supplies can be obtained from BBV.

Each Keyboard must have a unique address between 1 and 4. Keyboards sharing the same address will not be recognised by the matrix and unpredictable operation will occur.

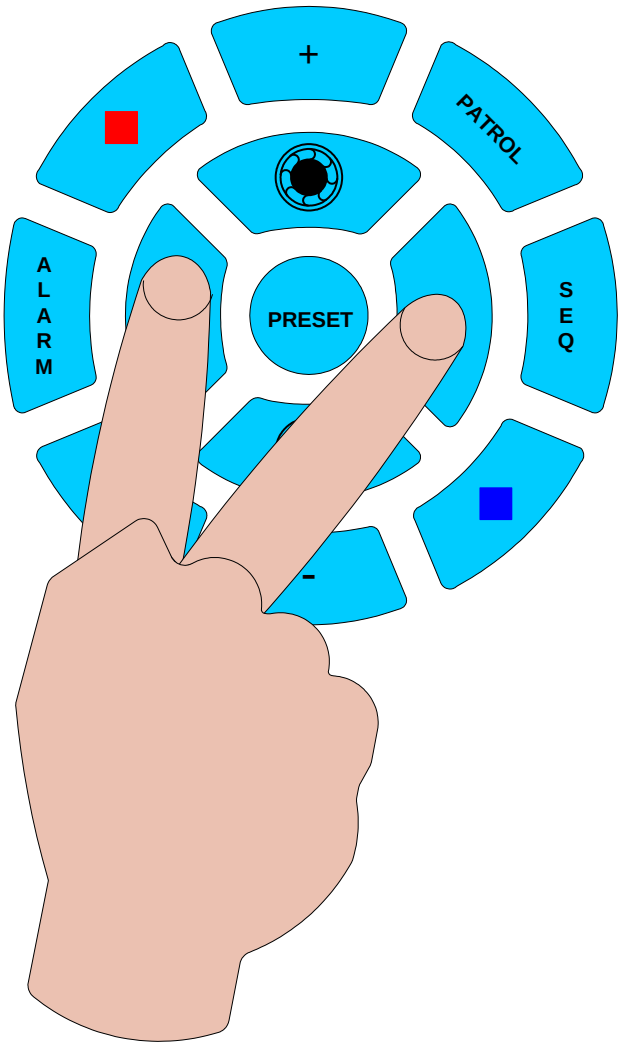

Addressing the Keyboard.

The default keyboard address is 1.

To change the address of your keyboard, press and hold the focus far and focus near buttons and apply power to the keyboard.

The 1 key will be illuminated blue to indicate that address one is selected. To change the address simply press a number between 1 & 4. It will change to blue and then shortly after the keyboard will return to its normal operation.

If nothing is pressed the keyboard will also return to normal operation after approximatly 5 seconds.

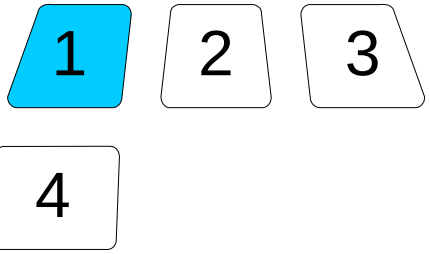

Disabling/Enabling the program keys.

To enable/disable the programming key as well as the #, press and hold the focus far and focus near buttons and apply power to the keyboard. Press the PROGRAM button to toggle between enable/disable.

If the  key is blue, the programming is enabled.

If the  key is red, the programming is disabled.

If nothing is pressed, the keyboard will return to normal operation after approximatly 5 seconds.

BBUS Termination



The keyboards data connection can be terminated or unterminated depending on where it is sited on the BBUS.

To do this, switch the two switches on the rear of the keyboard to the ON postion, shown to the left.

To unterminate, position both switches to OFF.

Self Test of the keyboard

The keyboard supports a self test for in the field testing. This will enable the services engineer to confirm the functionality on the Tx1500/KBD in the field. To perform this test you will need to make a Loop Back test cable.

Loop Back test cable

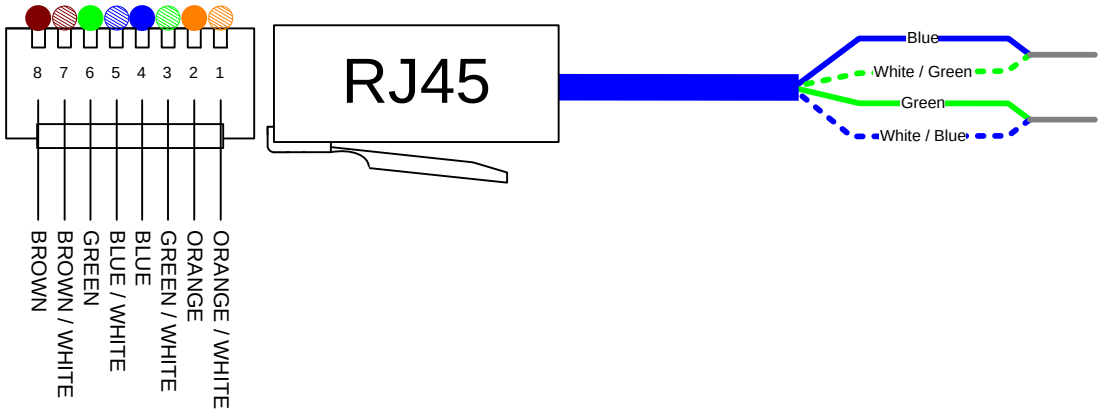

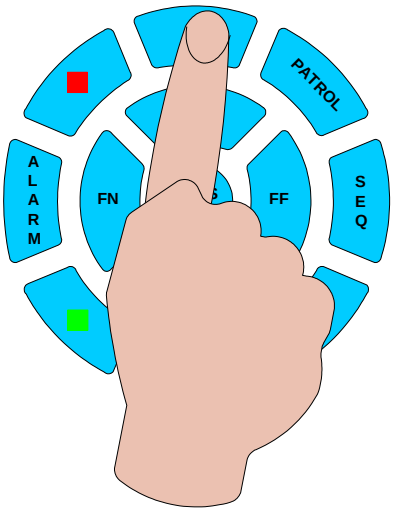

With the loop back cable fitted, press and hold the + and apply power.

When the power is applied you will see the function keys glow pink and blue. You can test each individual button by pressing it. As a button is pressed it will beep and it will turn white, if this happens we know the key is okay. If the Loop Back cable is not fitted or the port is faulty the back light will not go out. The preset should make a louder beep when pressed as it tests the buzzer.

The - key should be left till last as it will enter the keyboard into the joystick test mode.Once in this mode, when you move the joystick in the different direction you will see the respective keys acuminate. Once you have done testing the unit, please remove all power and re apply to put the keyboard into normal operation.

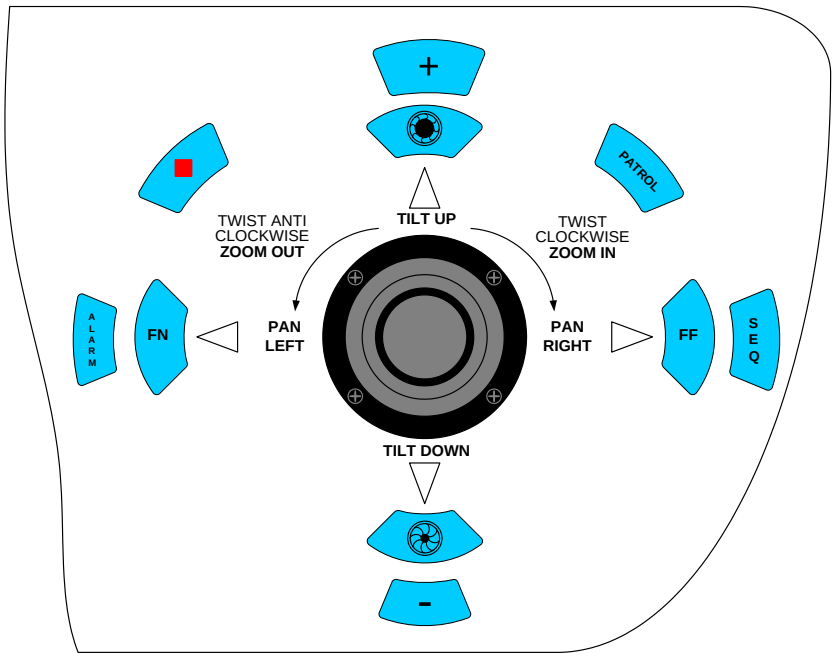

Extend your BBV Warranty from 12 months to 3 years

As of the 1st September 2008 BBV have offered our customers the opportunity to extend the standard 12 month warranty to 3 years.

You must register for the extended warranty within 12 months of the date of manufacture.

How to register for the 3 year warranty

Registering for the new, longer 3 year warranty term is quick and easy.

Either:

Complete the warranty application card that comes in the box with your BBV product, and return it FREEPOST to BBV:

BBV 3 Year Warranty

If this card is returned with the serial number of the product and the Installation company details BBV will extend the warranty period from 12 Months to 36 Months.

☐ Number of Units, ☐ Start Serial No. ☐ Final Serial No.

Contact Name. _____

Company Name. _____ Please could you send me information especially on:

Phone Number. _____ ☐ Rx100s

Site Name. _____ ☐ Rx45x & Rx55x

Address 1. _____ ☐ FBM Video Matrices

Address 2. _____ ☐ Tx1500 Video Matrices

Address 3. _____ ☐ Starcard & Starcard Converters

Post Code. _____ ☐ BBV Quad

e-mail address. _____ ☐ Pick A Point

Do you read. Professional Security | International Security | PSI MAGAZINE | SC

☐ I do not require any other further product information,
Please refer to WWW.BBVCCTV.COM for terms, conditions & exclusions

VAT Reg. No. 621758439 Registered in England No. 2852921 Registered office: 17 Apex Park Diplocks Way Hailsham East Sussex UK BN27 3JU

Or alternatively:

Register online at: www.bbvcctv.com
Simply enter your details on the 'Warranty Cover' page.

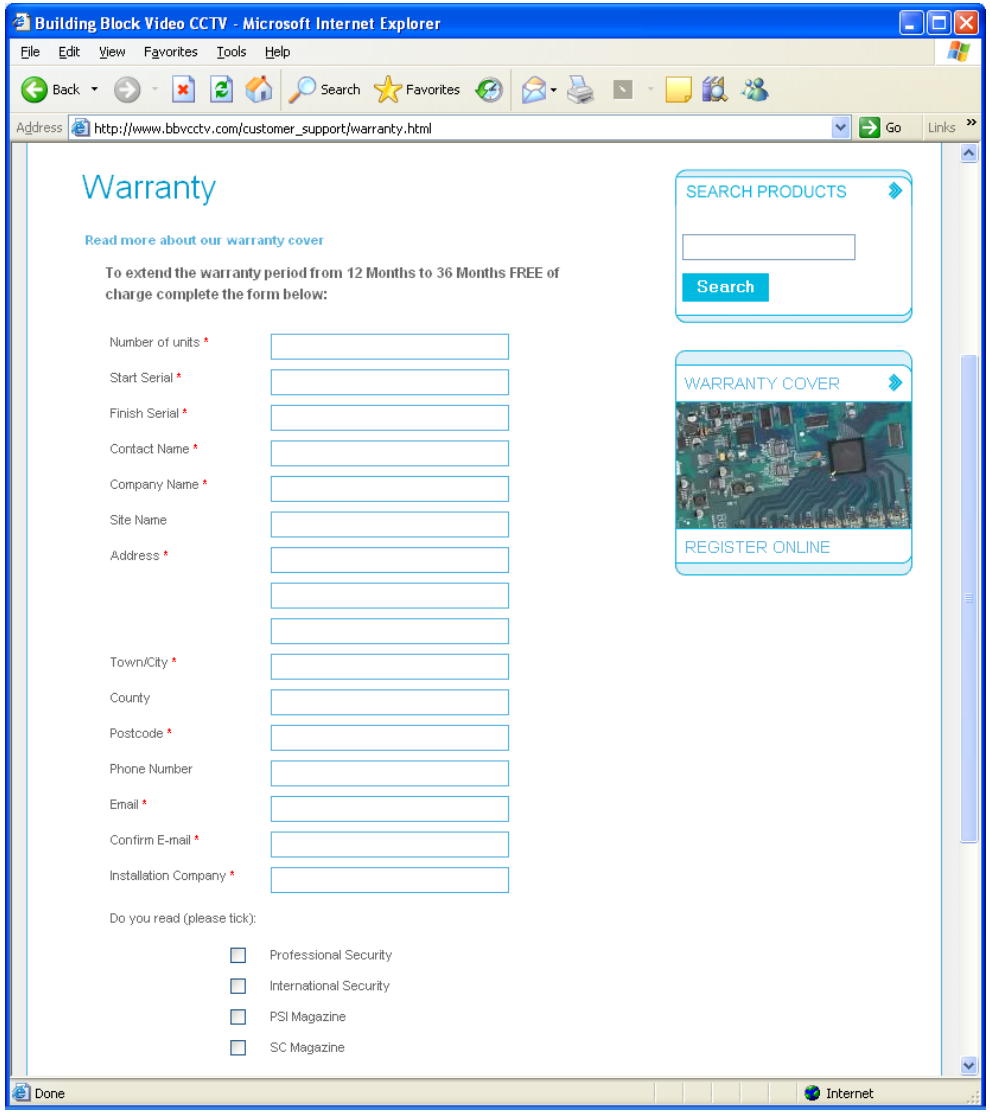

Building Block Video Ltd

Tel: + 44 (0) 1323 842727
Fax: + 44 (0) 1323 842728
Support: + 44 (0) 1323 444600
www.bbvcctv.com